

**Annual Technical Report to DARPA**  
**December 1, 1980 - September 30, 1981**

# **Dynamically Stable Legged Locomotion Research**

Marc H. Raibert (Principal Investigator)

H. Benjamin Brown, Jr.

Michael Chepponis

Eugene Hastings

Steven E. Shreve

Francis C. Wimberly

30 October 1981

Sponsored by Defense Advanced Research Projects Agency (Dol)~, Systems Sciences Office, ARPA Order No. 4148 under contract number MDA903-8FCO13O issued by Department of Army, Defense Supply Service-Washington, Washington, DC 20310. Effective date of contract December 1, 1980. Expiration date of contract September 30, **1981**.

The views, **opinions**, and findings contained- in this report are those of the authors and *should not* be construed as an official Department of Defense position, policy, or decision, unless so designated by other official documentation.

# Acknowledgements

We thank John Chiesa, Martin Leister, Jeffrey Miller and John Tanner for their many contributions in the laboratory. We thank Denise Bussard and Pamela Mills for their work on this document and Kitty Fisher for doing the figures.

The California Institute of Technology and the Jet Propulsion Laboratory provided early support that led to the present project. Bill Whitney and Ewald Heer were particularly helpful in providing an atmosphere where things could get started. Craig Fields and Clint Kelly deserve special credit for letting the idea of legged technology capture their imaginations, even before we could show them tangible results.

We are especially indebted to Ivan Sutherland for his very early encouragement, for help in finding funding, for his many technical contributions, for his criticism, and for his cheers when we make progress.

# Table of Contents

<b>1. Introduction and Summary</b>	<b>3</b>
<b>2. Analysis and Simulation of Planar Hopping</b>	<b>9</b>
2.1 A Simple Model	9
2.2 Control	10
2.2.1 Vertical Control Hopping	10
2.2.2 Horizontal Control - <b>Balance</b>	16
<b>2.2.2.1</b> Foot Placement Control	17
2.2.2.2 Stance Control	18
2.2.2.3 State Space Response Method	21
2.2.2.4 Polynomial Approximation to State Space Response <b>Table</b>	25
<b>2.2.2.5</b> Optimal Control	28
<b>3. Physical Experiments</b>	<b>33</b>
<b>3.1</b> Planar Hopper	33
3.1.1 Mechanism	33
3.1.2 Sensors	35
3.1.2.1 SELSPOT filter	39
3.1.3 Results	39
3.2 Design of 3-Dimensional Hoppers	41
3.2.1 Simple 3-D Hoppers	41
3.2.2 Advanced 3-D Hopper	43
3.3 High Performance Hydraulics	45
<b>I. Equations for One-Legged Planar Hopper</b>	<b>49</b>
<b>II. Simulation Parameters</b>	<b>51</b>
<b>III. Legged Locomotion Bibliography</b>	<b>53</b>

## List of Figures

Figure 1-1:	Sequence taken from simulation of sweep control. One frame every .1 sec. The x-axis has been stretched to make the figure clearer. Actual translation during flight is about equal to <b>the width of the</b> vehicle.	5
Figure 1-2:	Photograph of planar hopper .	6
Figure 2-1:	Diagram of ideal one legged hopping mechanism, <i>Ideal Planar Hopper</i> .	9
Figure 2-2:	Vertical hopping. Starting from rest, total energy is increased until desired hopping height is attained. Hopping height is regulated through control of vertical actuator $u_2$ .	13
Figure 2-3:	Phase plot for vertical hopping. Four control events are indicated where curve crosses axes. Data from stable part of Figure 2-2.	14
Figure 2-4:	Vertical energy for two hopping cycles at constant height. Total energy, kinetic energy, gravitational potential, and elastic potential are shown. Data from Figure 2-2.	14
Figure 2-5:	Total energy plotted in polar form. Radius is magnitude of energy, angle is $\text{Arctan}(y/2)$ . Left) Data of Figure 2-4 replotted. Right) Period during which hopping height increases. (Circles indicates 50 joules.)	15
Figure 2-6:	Vertical hopping sequence. At times $t = 9, 15, 25, 35, 45, 55, 65$ desired hopping height $H = 1.7, 2.0, 1.6, 1.9, 1.4, 1.9, 1.4$ . The descent beginning at $t=65$ is passive.	15
Figure 2-7:	Horizontal <i>position step controlled by linear</i> method.	18
Figure 2-8:	Three possible cases during stance period: a) Foot is placed in center of region swept by projection of center of gravity. b) Foot is placed toward rear of region, causing body to fall forward during stance interval. c) Foot is place toward front of region, causing body to fall rearward during stance interval.	19
Figure 2-9:	Sweep control with constant horizontal velocity of .75 m/sec.	21
Figure 2-10:	The data of Figure 2-9 replotted in cartoon form. Dotted lines indicate path of body and foot. 40 msec/dot, 1 sec/stick figure .	21
Figure 2-11:	Sweep control with horizontal acceleration .	22
Figure 2-12:	Cartoon of data from Fig. 2-11. 20 msec/dot, .6 sec/stick figure .	22
Figure 2-13:	Drop balance test using state space response method -	24
Figure 2-14:	Lateral step controlled by state space response method .	25
Figure 2-15:	Drop balance test controlled by 86 term polynomial. Solid lines show results under control of polynomial approximation. Dotted lines are results using original tabular data.	26
Figure 2-16:	Cross section through response space that compares tabular data to 625 term polynomial. Slice of response space specified by $x_2 = x_3 = 0$ . Plotted on ordinate are: Left) $x_2$ Right) $x_3$ .	27
Figure 2-17:	Drop balance test under control of 625 term polynomial .	28
Figure 3-1:	Physical Planar Hopper .	34
Figure 3-2:	<i>Parts that make up</i> Planar Hopper: body, leg, spring, cylinders, valves, manifold, air bearings, and assorted miscellany .	35
Figure 3-3:	Kinematics of Planar Hopper .	37
Figure 3-4:	How sonar will be used to measure body altitude and body angle .	37
Figure 3-5:	Top) Selspot camera overlooking planar hopper. Bottom) Pattern of LEDs on hopper. .	38
Figure 3-6:	Vertical behavior of physical hopper. Left) As recorded by Seispot. Right) As recorded by camera with low shutter speed .	39
Figure 3-7:	Phase plot of vertical hopping data recorded from physical hopper with Selspot.	40
Figure 3-8:	Simple 3-dimensional hopper with linear leg action .	42
Figure 3-9:	Simple 3-dimensional hopper with articulated leg .	43
Figure 3-10:	Preliminary leg design for multi-legged balancing vehicle.	44

Figure 3-11: Photograph of hydraulic cylinder, position sensor, velocity sensor, and force sensor.

46

Figure 3-12: Diagram of experiments with high performance hydraulics.

47

### III Introduction and Summary

In an effort to understand balance and resonance in legged locomotion we are studying a system that balances on a single leg while hopping in resonant elastic oscillation. Our short term objective is to do experiments that let us explore the basic computational issues underlying balance, dynamic control, and resonant oscillatory behavior as they affect legged systems. Our longer term goal is to develop a systematic understanding of the legged locomotion problem. This will help determine the potential benefits for domestic and military exploitation, to provide the scientific foundation upon which useful transportation systems may be constructed, and to help explain the behavior we observe in naturally occurring legged systems. No such understanding is available today and its lack is sorely felt .

The work reported here describes modelling and simulation of a one legged hopping machine, techniques for controlling the vertical and horizontal behavior of the simulated hopper, [development of an experimental physical hopping machine](#), and initial designs for machines that will balance in three dimensions.

One need only watch a few slow motion instant replays on Saturday afternoon sports television to be amazed by the variety and complexity of ways a human can carry, swing, toss, glide, and otherwise propel his body through space. Orientation, balance, and control are maintained at all times without apparent effort, while the ball is dunked, the bar is jumped, or the base is stolen. Such spectacular performance is not confined to the sports arena - behavior observable at any school playground is equally impressive from a mechanical engineering, sensory motor integration, or computer science point of view. The final wonder comes when we observe the one year old infant's first wobbly steps with the knowledge that running and jumping will soon be learned and added to the repertoire .

Despite these accomplishments in using his own legs to locomote, man is still at a primitive stage in the development and construction of legged vehicles. They don't have the mobility, agility, versatility, and energy advantages of biological legged systems. Since animals large and small use legs for locomotion they are able to move quickly and reliably over flat, hilly, and mountainous terrain, or through forest, swamp, marsh and jungle. But we have neither theory nor understanding of legged locomotion to explain the behavior we see *in natural systems*, nor to build machines with similar properties. As a result our mobility is generally limited by dependence on roads, runways, the beasts of burden, and our own two feet.

The present research was triggered by two observations :

- . Most biological walkers larger than insects depend on active balance and dynamic stability as basic operating principles. Existing man-made walking machines rely solely on static techniques for support.
- \*Biological systems have elastic muscles and tendons that participate in resonant mechanical oscillations during locomotion [4, 175J, whereas man-made walkers usually have rigid legs with no suspension.

We have taken these observations to heart in formulating our studies of legged locomotion. The main issues then are balance and resonant oscillation. Our method of focussing on these issues is to experiment with hopping systems having only a single leg -- neither balance nor oscillation may be ignored .

During walking, running, and hopping, legs do two things. They store energy in springy muscle and tendon when the leg shortens, returning some of it when they lengthen, and they move back and forth to

propel and to provide balance. We have modelled this behavior in an experimental vehicle with a single leg that changes length under the influence of a large spring, and a simple rotary hip that moves the leg back and forth. We call this model the *Ideal Planar Hopper*.

Since only one gait is possible for this one legged device the problem of gait selection is particularly simple and of little interest. Instead, we decompose control of the planar hopper into two parts, a vertical hopping part and a horizontal balance part. The primary role of the vertical controller is to establish a regular framework within which alternation of stance phases and transfer phases can occur. The basic timing and rhythm of locomotion is governed by this vertical oscillatory system. The horizontal part is responsible for balancing the system and causing it to translate from place to place. All the actions of the horizontal part are synchronized by key events in the vertical hopping cycle.

It is the purpose of vertical control to achieve stable, energy efficient hopping that provides a framework within which locomotion can take place. We developed an asynchronous hopping cycle in which each control action is keyed to one of four events: **LIFT-OFF** - the foot leaves the ground, **PEAK** - the vehicle is momentarily suspended in air at the top of a hop, **TOUCH-DOWN** - the foot touches the ground during landing, and **BOTTOM** - the main elastic elements of the system are maximally stretched at the bottom of a hop. We found that a measure of the total vertical energy is very useful in predicting and controlling hopping altitude despite mechanical losses and irregular terrains.

There are two ways to control horizontal behavior of the hopper. One is to manipulate placement of the foot just before **TOUCH-DOWN** - placement will determine the direction of falling during the subsequent stance period. The other way is to apply torque to the hip during stance, thereby changing the angular momentum of the body. We have experimented with three methods for balance, two that only use foot placement, and a third that combines foot placement with hip torque.

#### Linear Foot Placement

This first method determines foot placement as a linear function of errors in the three important state variables: body angle  $\theta$ , body angular rate  $\dot{\theta}$ , and horizontal body rate  $\dot{x}$  as defined in Figure. 24. The leg is positioned just before **TOUCH-DOWN** so that the horizontal distance between the foot and the projection of the vehicle's center of gravity is specified by this linear function. In simulation we have found that this simple approach is very good at maintaining balance. A wide variety of initial conditions and disturbances are permissible without causing crashes. However, we also found that limit cycles in horizontal velocity are hard to avoid.

#### Sweep Control

Sweep control grew from a simple observation: During the stance part of constant velocity horizontal locomotion, a legged vehicle's center of gravity translates by a predictable amount at a fixed rate. Therefore, it is possible to plan a sweeping motion of the leg during stance such that: a) the constant horizontal velocity of the body is not impeded, and b) balance is maintained. This control combines foot placement with hip torque. However, for the special case of zero horizontal velocity, the method simplifies to the linear controller described above.

Simulations of sweep control have provided our most exciting results to date. Very high horizontal velocities are achievable, stability is very good, and the resulting locomotion begins to look very like the behavior of biological systems. Figure 1-1 shows a sequence of vehicle positions obtained in a simulation of sweep control.

## State Space Response Method

As a follow up to Raibert's earlier work on robot manipulator dynamics [213], we explored a control method that uses a large table - about 10,000 numbers to control the simulated hopper. The *State Space Response Method* is able to make a very useful prediction just before each TOUCH-DOWN for each possible foot placement it predicts the vehicle's state at the time of next UFT-OFF. These predictions are used to select the best foot placement at TOUCH-DOWN during each hopping cycle. This table lookup method provides a tabular solution to the vehicle's nonlinear equations of motion, where no closed form solution is known.

The performance of the state space response controller is very good. Not only can it balance and perform well controlled translations, but in contrast to the linear method, horizontal velocity is controlled with great precision.

LIFT-OFF                      TOP                      TOUCH-DOWN                      BOTTOM

Figure 14: Sequence taken from simulation of sweep control. One frame every .1 sec. The x-axis has been stretched to make the figure clearer. Actual translation during flight is about equal to the width of the vehicle.

We have designed and fabricated a physical hopping machine that serves as a testbed for the ideas developed through analysis and simulation. Figure 1-2, is *a photograph of* the planar hopping machine in its present state. Two pneumatic cylinders act together under computer control to excite vertical oscillations, and to balance through horizontal leg motion. Presently, all sensory information is provided by an electro-optical sensor, Seispot, that watches the hopper's behavior from a nearby tripod. Other sensors are in various stages of development; linear encoder, rate gyro, down looking sonar, and more sophisticated use of the Seispot.

We have implemented a very simple vertical control that excites and maintains resonant hopping oscillations in the physical hopper. Our design goal of four inch ground clearance on each hop is now achieved consistently since improving the mechanical design of the system's air bearings and the leg's linear bearing. We have begun work on balance control, but have no results at the time of this writing. We found that one of our earliest design\* decisions was a bad one: Bang-bang pneumatic control of coupled actuators is a tricky business that is best avoided.

*Two new projects are well under way.*

\*Our major activity for the coming year focuses on balance in 3 dimensions. We have a preliminary design for a one legged experimental vehicle that will locomote in 3-space without mechanical support. As with our planar work, the major emphasis is on balance and resonance. The basic mechanism will have three hydraulic cylinders, two of which are servo controlled and

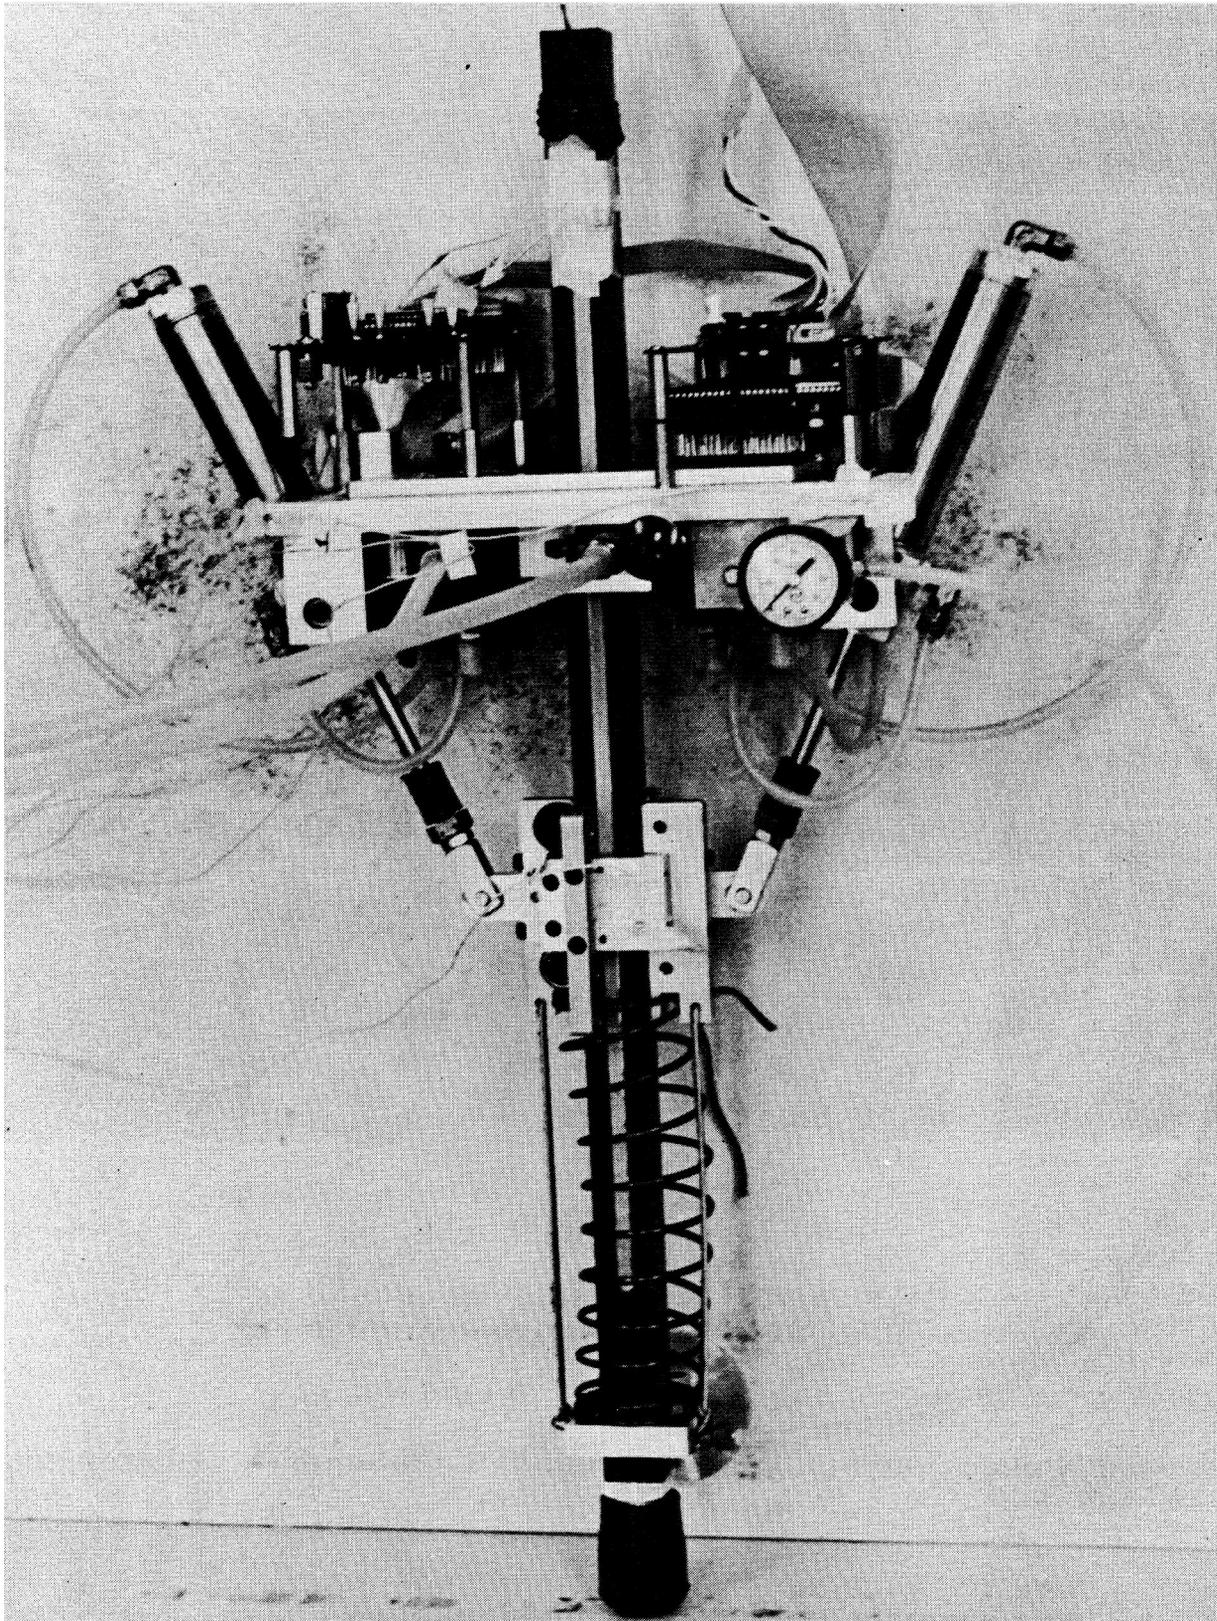


Figure 1-2: Photograph of planar hopper.

one of which is bang-bang controlled. Elastic elements play a central role in the design. This arrangement is designed to provide energy conservative vertical motions and high performance balance motions. This new design incorporates improvements based on what we are learning from the planar hopper.

. We have purchased a very high performance hydraulic cylinder with instrumentation for compliant control. With this apparatus we plan to explore a technology that may be very important for future legged systems as well as other forms of robots. Our plan is to implement a *mechanism simulator that can* imitate combinations of masses, springs and dampers of various sizes.

## 2. Analysis and Simulation of Planar Hopping

### 2.1 A Simple Model

A seed that led to these studies was planted when Raibert noticed that during biological locomotion legs do two things: they change length and they change angle. It usually doesn't matter whether the animal is walking, running or hopping, or whether the leg is part of a quadruped, biped, or monoped (kangaroo). They lengthen actively under control of muscle to propel the body forward and upward, and shorten actively while swinging the leg forward. They also shorten passively during loading to store energy in stretched muscle and tendon, and lengthen passively during unloading to return some of that stored elastic energy. Legs also swing back and forth. This motion permits feet to be precisely positioned *with* respect to an animal's center of gravity, and permits torques to be applied to change angular momentum.

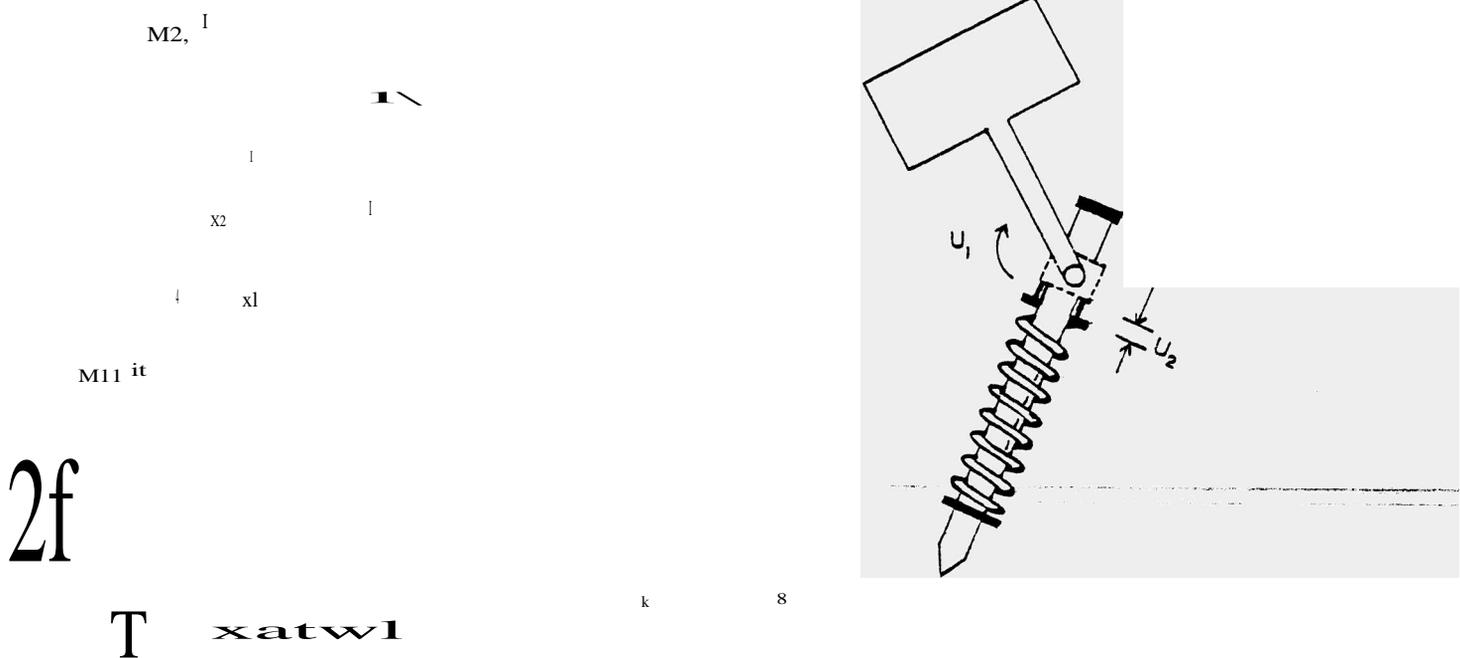


Figure 2-1: Diagram of ideal one legged hopping mechanism, *Ideal Planar Hopper*.

We have modelled this behavior in a vehicle *with* a single leg that changes length under the influence of a large spring, and that rotates about a simple rotary hip. This very simple model captures what is important in dynamic locomotion while avoiding the complications implicit in systems with many legs. Figure 21 shows the idealized mechanical system under study. A leg of mass  $M_1$ , moment of inertia  $I_1$  is connected to a body of mass  $M_2$  moment of inertia  $I$ . A joint between these links permits linear sliding motion and rotation. Control torque  $u_1(t)$  is applied at a rotary joint at the hip. Linear motion of the body sliding on the leg is controlled by a spring of stiffness  $K$  and length  $w$  in series with a linear position source of length  $u_2(t)$ . The linear actuator adjusts the spacing between the body and spring to control forces acting

between the leg and body. A mechanical stop, modelled as a very stiff region of the main spring, limits extension of the main spring beyond its rest length. For  $w > w_0 + u_2$  the spring becomes stiff,  $K = K_2$ , and damped,  $B = B_2$ .

The ground is modelled as a two dimensional spring and damper ( $K_G, B_G$ ). This spring and damper interact with the hopper only when the foot is in contact with the ground,  $y_0 < 0$ . Each time *the foot* touches the ground the rest position of the ground spring is reset.

Equations of motion for the entire mechanical system are found in Appendix I. Since we have no closed form solution to these differential equations, a numerical algorithm is used to determine the system's behavior as a function of time. All the simulations discussed below are accomplished by using such numerical solutions in conjunction with the controllers being studied. The numerical constants used throughout the paper are given in Appendix II.

## 2.2 Control

There are two sets of behaviors that are central to our study of planar hopping: vertical oscillation and horizontal balance. The vertical part involves generating a stable series of resonant oscillations that take a system off the ground and control the height of each jump. The horizontal part must maintain balance during hopping, and achieve the correct lateral position and translation over a support surface.

### 2.2.1 Vertical Control Hopping

Unlike a wheel which changes its point of support continuously and gradually while bearing weight, a leg changes its point of support all at once and must be unloaded to do so. Therefore, in order for a legged system to progress there must be a framework of activity for each leg in which there is a time when the leg bears weight and the foot cannot be moved, and another time when the leg is unloaded and the foot free to move. Such an alternation between a loaded phase, called *stance*, and an unloaded phase, *transfer or flight*, is found in every form of legged locomotion. To first order a vertical controller is responsible for providing such an alternation framework. For a single leg or for sets of legs that work together we call this alternation cycle hopping.

We have designed a vertical controller that:

- Initiates hopping
- Terminates hopping
- Controls the height of hopping
- Maintains stable hopping during horizontal control

The basic mechanism through which each of these actions is accomplished is controlled excitation of a spring/mass gravity/mass oscillator. Hopping is initiated by exciting the spring/mass oscillator with a linear actuator until escape velocity is reached - when inertial forces are sufficient to overcome gravity the foot leaves the ground and hopping begins. At this point the system becomes a spring/mass-gravity/mass oscillator.

To understand regulation of a hopping system's vertical behavior it is useful to think about energy, its

storage and its dissipation. We take a look at the simplified case in which  $\theta$  and  $\dot{\theta}$  are small and angular rates can be ignored - motion is primarily vertical. For the present model there are six ways energy can be stored:

1. Kinetic energy of body
2. Kinetic energy of leg
3. Gravitational potential of body
4. Gravitational potential of leg
5. Elastic potential of the main spring (including mechanical stop)
6. Elastic potential of the support surface, the ground

Therefore, the total vertical energy during stance is:

$$E_{\text{STANCE}} = PE_{g(M1)} + PE_{g(M2)} + KE(M1) + KE(M2) + PE_e(M1) + PE_e(M2) \quad (2.1)$$

$$= M_1 g y_1 + M_2 g y_2 + \frac{1}{2} M_1 v_1^2 + \frac{1}{2} M_2 v_2^2 + \frac{1}{2} k (w_0 - w + u)^2 + \frac{1}{2} k_s u^2$$

where

- $PE_g$  gravitational potential energy
- $PE_e$  elastic potential energy
- $KE$  kinetic energy
- $g$  acceleration of gravity
- $w_0$  is the rest length of the spring.

Notice *that we* have chosen expressions for potential energy that are zero when the hopper is standing vertically with the foot just touching the ground. This will make the analysis simpler later. Ignoring windage which is typically less than 5% of the total, there are two ways energy can be lost:

1. Damping in main spring (including mechanical stop)
2. Damping in ground spring.

There are two events in a hopping cycle during which most energy loss occurs. At TOUCH-DOWN most of the leg's potential energy is dissipated by ground damping:

$$E_{\text{TD-LOSS}} = KE(M1) = \frac{1}{2} M_1 v_{\text{TD-}}^2 \quad (2.2)$$

where

- $v_{\text{TD-}}$  the velocity just before TOUCH-DOWN.
- $\text{TD-}$  subscript means just before TOUCH-DOWN.

At LIFT-OFF damping in the main spring's mechanical stop, the stiff region, dissipates a fraction of the system's kinetic energy:

$$E_{\text{LO-LOSS}} = \frac{M_1 KE(M2)}{M_1 + M_2} - \frac{M_1 M_2 v^2}{2(M_1 + M_2)} \quad (2.3)$$

\*There is actually ground damping throughout stance, but such losses are generally small.

where

$KE$  (N/2) is the total kinetic energy  
 $v_{2 To-}$  the vertical velocity of the body just before LIFT-OFF  
 $u_{2 To-}$  means just before LIFT-OFF.

The fraction,  $M1/(M1 + M2)$  was found by equating momentum before and after LIFT-OFF. It's interesting that this loss is minimized when the leg/body mass ratio is minimized, ie. when unsprung mass is minimized.

In addition to these energy losses there is an energy source, the linear actuator of length  $u_2$ . Since this actuator is in series with a spring it does work on the system when it changes length. If  $u_2$  instantaneously changes from  $u_{21}$  to  $u_{2+}$ , then there is an energy change:

$$\Delta E_{u_2} = K_s \left[ \frac{1}{2} (u_{2+}^2 - u_{21}^2) + u_{2+} (w_0 - w + u_2) \right] \quad (2.4)$$

Actually this actuator can also be an energy sink -- when  $\Delta E_{u_2}$  is negative total energy is reduced. Also note that the magnitude of  $\Delta E$  depends on  $w$  -- more work is done when the main spring is compressed than when it is relaxed. Therefore, lengthening the actuator at BOTTOM and shortening during flight causes the total energy in the system to increase on each hop. On the other hand, shortening the actuator at BOTTOM and lengthening during flight causes the total energy in the system to decrease, eventually to zero.

Now we are ready to control hopping height, H. If the main spring is at equilibrium during flight, all energy takes the form of gravitational potential at PEAK where  $y_2 = 0$  by definition. Therefore, for the case when the vertical actuator is inactive we can predict the height of the next hop at any time during stance. We assume complete state information to be available, neglect ground losses after TOUCH-DOWN and elastic potential just before LIFT-OFF. At LIFT-OFF the total vertical energy takes the form of kinetic energy:

$$E_{Lift-Off} = E_{STANCE} \quad (2.5)$$

We know from (2.3) that there is a fractional loss of kinetic energy at LIFT-OFF. Combining (2.3) and (2.1) we get the total energy during flight:

$$E_{flight} = KE_{Lift-Off} \quad (2.6)$$

$$= \frac{M_2}{M_1 + M_2} KE$$

$$= \frac{M_1 g y_1 + M_2 g y_2 + \frac{1}{2} M_1 v_1^2 + \frac{1}{2} M_2 v_2^2 + \frac{1}{2} K_s (w_0 - w + u_2)^2}{M_1 + M_2} - \frac{1}{2} K_s (w_0 - w + u_2)^2 \quad (2.6)$$

Now this result can be used to control hopping height. For the body to hop to height H the total vertical energy must be:

$$E_H = M_1 g \left[ H - r_2 \cos(\theta_2) - (w_0 - r_1) \sin(\theta_1) \right] + M_2 g H \quad (2.7)$$

So at all times during stance the energy that must be supplied or removed by the vertical actuator to produce a hop of height H is:

$$\Delta E_H = E_H - E_{flight} \quad (2.8)$$

From (2.4) and (2.8) the linear actuator must extend by:

$$u_2 = -\frac{1}{K_s} \left[ \frac{1}{2} (u_{2+}^2 - u_{21}^2) + u_{2+} (w_0 - w + u_2) \right] + \frac{\Delta E_H}{K_s} \quad (2.9)$$

Actually, if (2.6) can be evaluated rapidly enough, it is not necessary to use (2.9). On each control cycle the sign of AE can be used to determine if  $u_2$  should be lengthened or shortened.

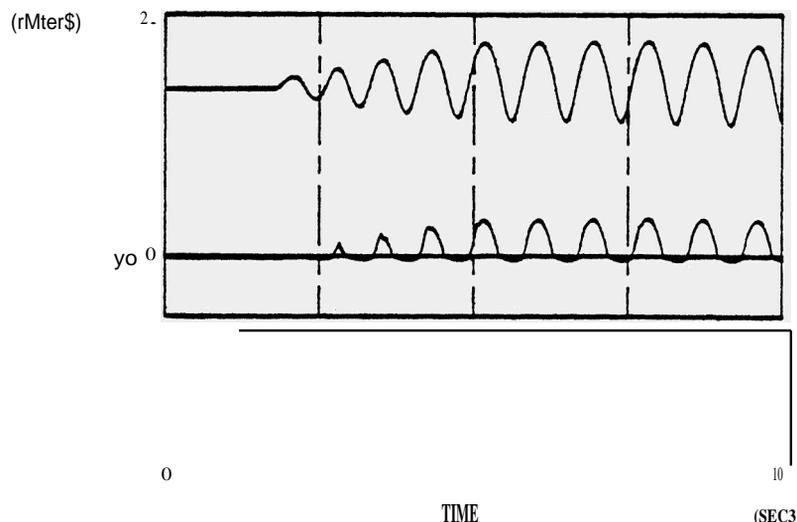


Figure 22: Vertical hopping. Starting from rest, total energy is increased until desired hopping height is attained. Hopping height is regulated through control of vertical actuator  $u_2$ .

This method was used to control the height of hopping in simulation. At BOTrOM, indicated by  $y_{r0}$  changing from negative to positive, (2.1) and (2.6) were used to predict hopping height.  $u_2$  was then lengthened or shortened accordingly. Figure 2-2 plots the vertical position of the foot and the body during a period of increasing hopping height, and during stable hopping. Starting at rest, the system executes a positive work cycle on each hop until the vertical energy increases to the correct value. Then it maintains this level. The finite response time of a physical actuator is simulated by making  $u_2$  increase or decrease with a quadratic trajectory. Since the range of the linear actuator stroke is finite the energy that can be injected on a single cycle is limited. Therefore, a number of cycles may be required to achieve a desired energy and height.

In these simulations shortening occurs during TOUCH-DOWN by letting the foot just touch the ground until the actuator is fully shortened. If there were no losses in the system it would no be necessary to activate  $u_2$  once a desired height of hopping was achieved. However, since there are losses it is necessary to replace the energy lost on each hop to get level hopping. The vertical controller injects or extracts the right amount of energy to achieve a desired hopping height based on of total vertical energy at BOTTOM.

It is sometimes useful to describe the vertical control cycle in the phase plane. If we plot body velocity on the abscissa and body altitude with respect to its resting altitude on the ordinate we obtain a phase plot. (See Figure 23.) Note the parabolic trajectory during flight caused by the constant gravitational acceleration, and the circular trajectory during stance due to the spring. Four events shown in this figure were chosen as control points to synchronize actions of the controller with ongoing behavior of the hopping system. These events are LIFrOFF - the moment the foot leaves the ground, PEAK - the point in flight when vertical velocity changes from positive to negative, TOUCH-DOWN - when foot first touches the ground, and BOTTOM - when vertical velocity changes from negative to positive.. Use of these events as control switching points allows a simple and reliable asynchronous implementation.

Figure 24 plots vertical energy during two cycles of flied height hopping (le. from time 7.5 to 9.3 in Figure 22). A lossless system would produce a perfectly flat total energy line. It can be seen that the primary losses occur when the foot strikes and leaves the ground. Energy increases during the latter part of stance,


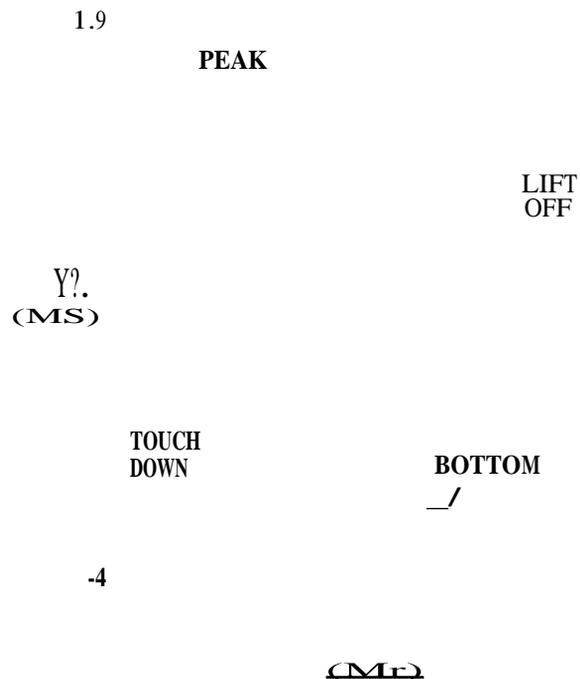


Figure 2-3: Phase plot for vertical hopping. Four control events are indicated where curve crosses axes. Data from stable part of Figure 2'2.

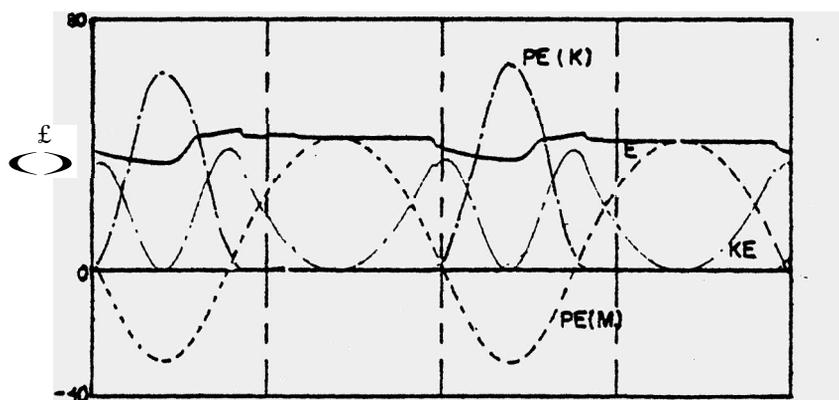

.40

TWO (SJ)

Figure 24: Vertical energy for two hopping cycles at constant height. Total energy, kinetic energy, gravitational potential, and elastic potential are shown. Data from Figure 2-2.

when the actuator operates. These data are replotted in polar form in Figure 25a. In this figure radius is magnitude of total energy, and angle is  $\text{Arctan}(y_2/y_1)$ . A lossless system would produce a perfectly circular total energy line. In this plot the curve crosses the axes at the same synchronization points LIFT-OFF, PEAK, TOUCH-DOWN, and 80-170M.

Figure 25b plots energy for the initial section of Figure 22. The spiral depicts the start-0 period

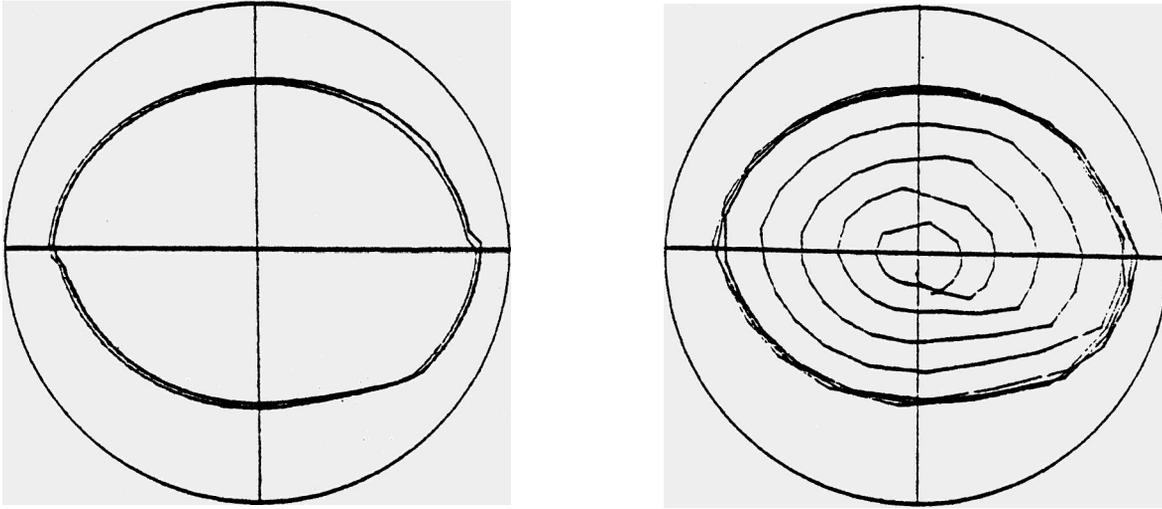


Figure 25: Total energy plotted in polar form. Radius is magnitude of energy, angle is  $\text{Arctan}(y/2)$ . Left) Data of Figure 24 replotted. Right) Period during which hopping height increases. (Circles indicate 50 joules.)

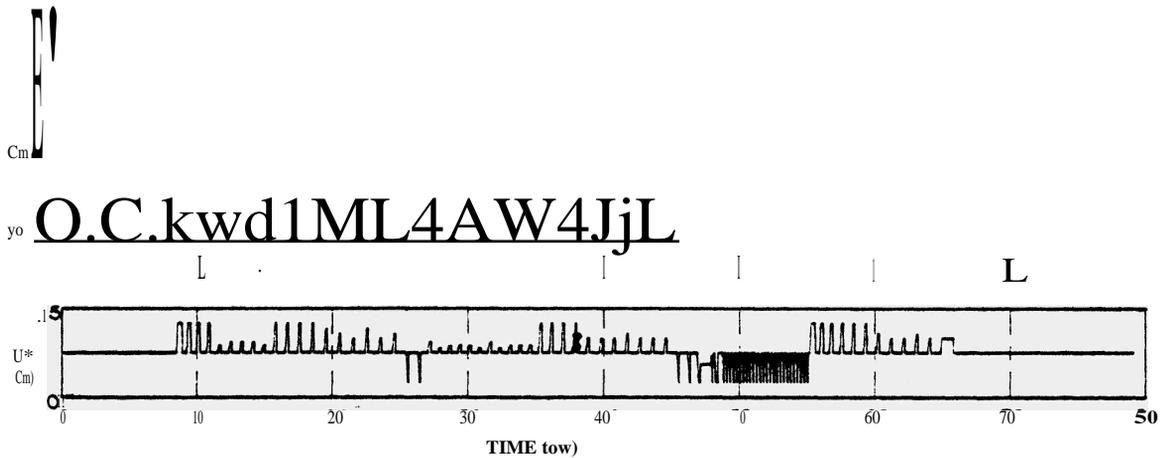


Figure 26: Vertical hopping sequence. At times  $t = 9, 15, 25, 35, 45, 55, 65$  desired hopping height  $H \approx 1.7, 2.0, 1.6, 1.9, 1.4, 1.9, 1.4$ . The descent beginning at  $t = 65$  is passive.

during which the system energy is pumped up. It takes a few cycles to achieve desired hopping height. Figure 26 shows a 80 second sequence of vertical hopping in which desired height is adjusted up and down. The

ability to regulate height during vertical hopping is clearly demonstrated here. Notice the difference between the speed of the controlled descent beginning at  $t=45$  and the passive descent beginning at  $t=65$ .

It is interesting that the time at which the leg is shortened during a steady state hop cycle can be manipulated to optimize a variety of criteria:

- . When the leg is shortened at LIFT-OFF, ground clearance of the foot during flight is optimized. This is important when terrain is uneven or when large horizontal sweeps of the leg will occur during flight, as when translating at high speed. If the leg is not short during these sweeps stubbing the toe is hard to avoid. Shortening at LIFT-OFF also minimizes the leg's moment of inertia during flight, so the leg can be swung forward faster and with less angular effect on the body.
- . When shortening occurs at PEAK the time between vertical actuations is maximized. This strategy could permit use of an actuator of lower bandwidth.
- . If shortening occurs upon TOUCH-DOWN, then the ground impact forces on the foot are minimized. This strategy is normally used by humans when they are asked to hop in place on a flat floor.

It is also possible to shorten the leg at LIFT-OFF, lengthen it again just before the next TOUCH-DOWN, and let it shorten during the landing. This strategy, apparently used by humans when running, maximizes ground clearance and minimizes impact forces on the foot. However this is accomplished at the expense of additional actuator bandwidth. Although more energy is required for these extra lengthening and shortening motions, the leg can be swung forward more efficiently with its lower moment of inertia.

### 2.2.2 Horizontal Control • Balance

A horizontal controller maintains balance and controls lateral motion. There are two parts to the control of horizontal and angular behavior of a legged hopping system: a part that works while the vehicle is in flight, and a part that works while the vehicle is in stance. During flight the leg can be moved to change the horizontal distance between the foot and the center of gravity. This distance will affect the direction of falling during subsequent stance. During stance torques applied to the hip directly modify the body's angular momentum. Here we describe three methods for balance, two that only position the foot, and a third that combines foot placement with hip torque.

All control techniques we've explored operate within a framework. One part of the framework is the regular cyclic activity of vertical hopping that synchronizes the flow of balancing activity. The four events of hopping, LIFT-OFF, PEAK, TOUCH-DOWN, and BOTTOM play an important role here. For instance, all of our methods start positioning the foot at peak and finish doing so just before TOUCH-DOWN. Thus vertical hopping events regulate the flow of horizontal control activity.

In addition to this timing part of the framework there is a second hierarchical part. In the context of the one legged model, we analyze horizontal control as a three level process:

- . At the highest level desired trajectories of horizontal motion,  $x_2(t)$  are controlled by manipulating the vehicle's state. It generally takes many hops to substantially modify horizontal position, so this is a low-bandwidth process. The input to this task level are user specified trajectories, and the output is a set of state variables:  $(\theta, \dot{\theta}, x_2) = f(x_2(t))$ .
- . The middle level of control is where we focus most of our attention. At this level vehicle state

variables are controlled by manipulating the leg, either its angular position at TOUCH-DOWN or its sweep during stance. This process takes action once each hop, so it generally takes a few hop, cycles to achieve a desired state. The inputs to this state level are state trajectories generated by the task level. The output selects leg angle or foot placement:

- At the lowest level desired leg angles are controlled by manipulating torque at the hip. This process runs at the servo rate of the hardware controller, executing many measurement/control cycles per hop - a 10 msec control cycle is typical. The inputs to this servo level are leg angles specified by the state controller, and the output is an actuator control signal:  $u_2(t) = F[\theta_{old}]$ .
- For all the experiments reported here the following PD controller is used to position the leg:

$$u_1(t) = K_p(\theta - \theta_{old}) + K_v(\dot{\theta} - \dot{\theta}_{old}) \quad (2.10)$$

For the present work the task control level is provided by an operator who runs the simulation or experiment. The servo level is fixed for all experiments as given in (2.10), though the gains may vary from experiment to experiment. The main focus of our work is on the state level. At this level the leg is positioned before each TOUCH-DOWN so that the state at next LIFT-OFF is optimized and the behavior of the leg during stance is specified. The following sections describe a number of approaches to state control.

### 2.2.2.1 Foot Placement Control

The simplest form of horizontal control we explored uses a linear combination of state errors plus information about the vehicle's center of gravity to specify foot placement during each TOUCH-DOWN. Our intention was to study a pure foot placement controller, in which no attempt is made to control balance during stance. Actually, during stance the controller maintains a constant hip angle between body and leg, so the vehicle behaves like a rigid inverted pendulum during this period.

Two factors determine where the foot is placed: projection of center of gravity and errors in state. A linear function of errors in state generates a displacement,  $x_{ERR}$  which is added to the projection of the center of gravity,  $x_{CG}$ . A leg angle is calculated that will place the foot at this point. Since the leg has mass, movement of the leg changes the projection of the center of gravity - simultaneous equations must be solved. The following analysis is done in a moving coordinate system fixed to the vehicle's hip:

First we find horizontal position of center of gravity:

$$x_{CoG} = \frac{(w_1 r_1) M_1 \sin(\theta_1) + w_2 M_2 \sin(\theta_2)}{M_1 + M_2} \quad (2.11)$$

The following linear combination of state errors provides corrective feedback:

$$x_{ERR} = K_1(\theta - \theta_{d}) + K_2(\dot{\theta} - \dot{\theta}_{d}) + K_3(\ddot{\theta} - \ddot{\theta}_{d}) \quad (2.12)$$

Placing foot at desired spot requires that:

$$w \sin(\theta) = x_{CG} + x_{ERR} \quad (2.13)$$

Substituting (2.11) into (2.13) and solving for foot placement with respect to hip and leg TOUCH-DOWN angle:

<sup>2</sup> Within the actuator and its support system there are likely to be additional low levels of control.

$$x_{TD} = \frac{r_1 M_1 \sin(\theta_1) + (M_1 + M_2) \dot{x}}{r_1 M_1 + w M_2} \quad (2.14)$$

$$\theta_1 = \arcsin \frac{r_1 M_1 \sin(\theta_1) + (M_1 + M_2) \dot{x}}{r_1 M_1 + w M_2} \quad (2.15)$$

Figure 27 plots  $\theta_2(t)$ ,  $\theta_1(t)$ , and  $\dot{x}(t)$  for a step in horizontal position achieved with this linear foot placement method. Simple rate control is used at the top level to control horizontal position. The lowest level servo controller is given by (2.10) with parameters specified in Appendix II. Balance using this method is remarkably stable—translations at a variety of rates and with different body attitudes are achieved while maintaining the upright posture.

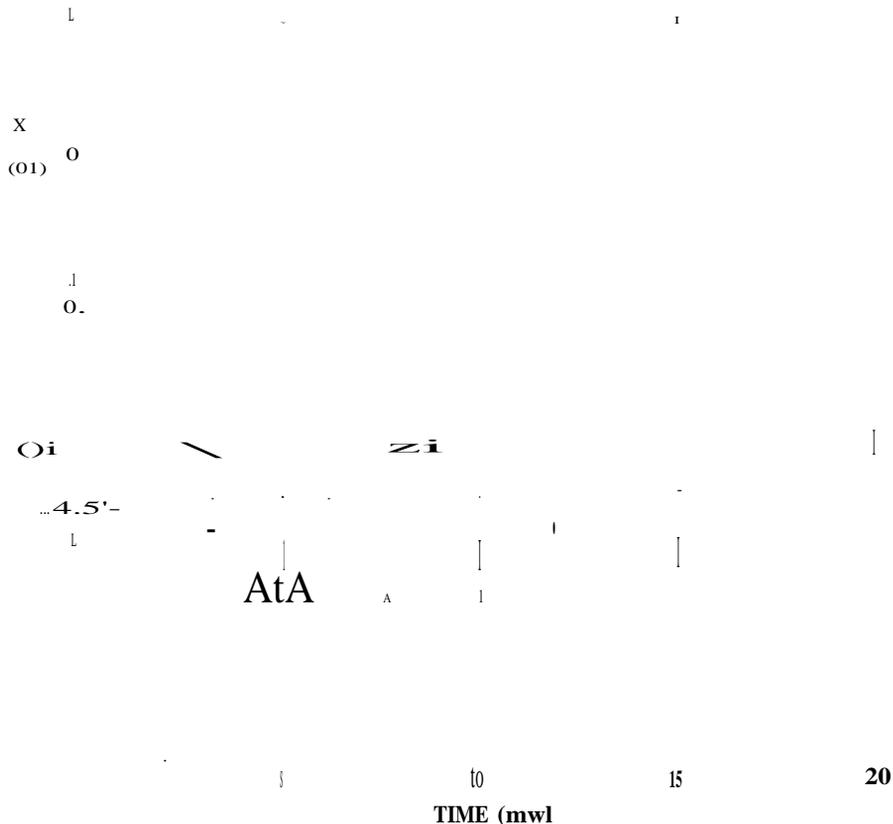


Figure 27: Horizontal position step controlled by linear method.

A limitation of the method is the maximum rate of translation. This is limited to about 0.5 m/sec by the relatively restricted motion of the leg while in stance. Also, limit cycle oscillations in horizontal velocity that can be seen in Figure 27 are difficult to avoid. Some of this may be due to the ad hoc procedure used to select the feedback gains,  $K_1$ ,  $K_2$ , and  $K_3$ —they were adjusted by hand based on observed performance.

### 2.2.2.2 Stance Control

As we have said, there are two mechanisms that can contribute to balance: foot placement at TOUCH-DOWN, and leg motion during stance. The above work focused solely on the role of foot placement so that we could get a clearer picture of its contribution. In this section we describe a very simple approach that includes control through leg motion during stance. The method of stance control examined is actually a generalization of the previous work on foot placement, as you will see.

For a legged vehicle moving at constant horizontal rate, the relative horizontal velocity between foot and hip during stance is just the rate of the hip. Therefore, if the leg is not to disturb the horizontal motion of the vehicle during stance it must sweep through an angle that is a function of speed. Furthermore, we would expect the balance of the vehicle to be least affected when the foot spends equal time during stance in front of the vehicle's center of gravity, and equal time behind. However, when state variables deviate from their desired values at TOUCHDOWN the vehicle's balance needs to be influenced. This deviation can be used to modify leg angle at TOUCHDOWN so that during the stance period the average position of the center of gravity is in front of or behind the foot. Figure 2-8 illustrates the three possible cases.

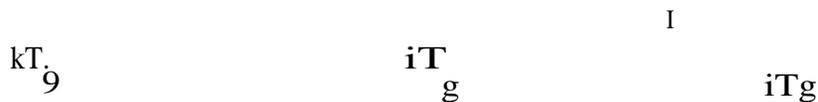


Figure 2•8: Three possible cases during stance period: a) Foot is placed in center of region swept by projection of center of gravity. b) Foot is placed toward rear of region, causing body to fall forward during stance interval. c) Foot is place toward front of region, causing body to fall rearward during stance interval

If we know in advance the duration of stance, the horizontal velocity of the body, and the geometry of the vehicle, then we can calculate an appropriate leg angle for TOUCHDOWN and sweeping function. To first order the time spent in stance is determined by the main spring and body mass. The natural frequency of this oscillating system is:

$$\omega_n = \sqrt{\frac{k}{m}} \quad (2.16)$$

The vehicle spends about a half cycle on the ground, so the duration of stance is:

$$T_{\text{STANCE}} = \frac{1}{\omega_n} = \frac{1}{\sqrt{\frac{k}{m}}} = \frac{\sqrt{m}}{\sqrt{k}} \quad (2.17)$$

For translational velocity  $x$  the horizontal distance traversed by the body during stance is:

$$A_{x_{\text{STANCE}}} = x T_{\text{STANCE}} \quad (2.18)$$

Viewed in hip coordinates, the foot sweeps through a horizontal region during stance. The center of this region is calculated in the same way that  $x$  is calculated for the linear foot placement method. We repeat (2.11), (2.12), (2.13), (2.14) and (2.15) here for convenience. First the horizontal position of center of gravity:

$$x_{CG} = (w-r)M_1 \sin(\theta_1) + rM_2 \sin(\theta_2) \quad (2.19)$$

Linear error function:

$$x_{ERR} = K_1(\theta_2 - \theta_{2d}) + K_2(\dot{\theta}_2 - \dot{\theta}_{2d}) + K_3(\ddot{\theta}_2 - \ddot{\theta}_{2d}) \quad (2.20)$$

Factor in leg mass:

$$w \sin(\theta_1) = x_{CO} + x_{ERR} \quad (2.21)$$

Solving for the center of the foot's sweep during stance with respect to hip :

$$x_{CENTER} = w \frac{r^2 M_2 \sin(\theta_2) (M_1 + M_2) \cos(\theta_1)}{r M_1 + w M_2} \quad (2.22)$$

Foot placement at touchdown, then is:

$$x_{TD} = x_{CENTER} + \frac{LX_{STE}}{2} \quad (2.23)$$

For vertical hopping in place, where  $\dot{\theta}_{2TD} = 0$ , (2.23) reduces to (2.14) of the linear foot placement method. Now the linear sweeping rule. At time  $t$  during stance:

$$x(t) = x_{TD} + x_{STANCE} \frac{(t-t_{TD})}{t_{STANCE}} \quad (2.24)$$

$$\theta_1(t) = \arcsin \left( \frac{x(t)}{w} \right) \quad (2.25)$$

We have implemented simulations of linear sweep control that show dramatic improvements in the quality and speed of horizontal locomotion over the linear position method. Figure 29 shows a .75 m/sec translation. In this plot the horizontal velocity is well controlled. Body attitude is stable in an upright position. The cartoon of Figure 2-10 lets one more easily visualize the data of this simulation.

A variation of the above stance control method is used when desired horizontal velocity is not constant as originally assumed for the derivation. During horizontal acceleration instead of determining foot placement and sweep magnitude solely on the basis of  $x$ , as done in (2.18) and (2.23), a compromise between actual and desired velocity is used:

$$x_{STANCE} = \frac{1}{t_{STANCE}} \max(\min(d, x_2, a_{MAX} t), x_1) \quad (2.26)$$

where

$a_{MAX}$  the maximum allowed acceleration .  
 $x_2$  the desired horizontal velocity .

This algorithm stretches the leg forward and lengthens the stride in order to accelerate. Velocity is automatically ramped up or down with roughly constant acceleration. Figure 241 shows data plotted for the case where the vehicle starts at rest with desired velocity of 4 m/sec. Figure 2-12 replots the data of 241 in cartoon form where the sequence of positions can be visualized.

The data shown here are by far the best we have produced for any form of horizontal control. However, there are still some problems. It turns out that stubbing the toe is difficult to avoid with a leg of the

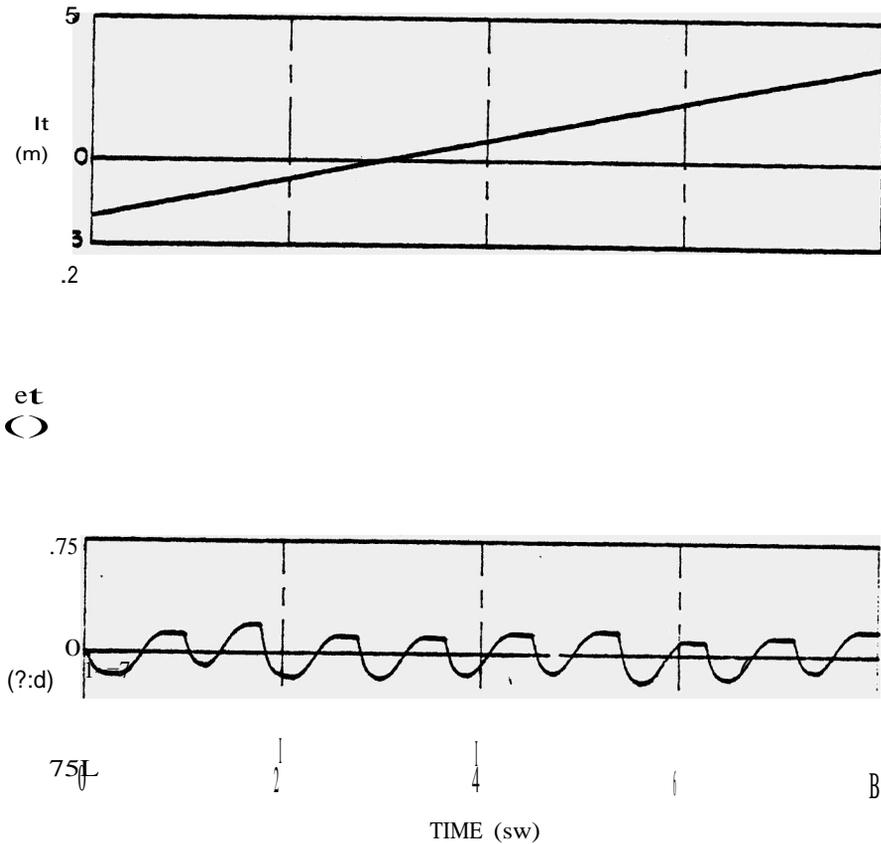


Figure 29: Sweep control with constant horizontal velocity of .75 m/sec.

Figure 210 The data of Figure 29 replotted in cartoon form.. Dotted lines. indicate path of body and foot. 40 r/sec/dot, 1 sec/stick figure.

*present design. An articulated leg that can substantially retract is important for achieving very high velocity translation.* This is one reason our next leg design will have rotary joints.

### 2.2.2.3 State Space **Response Method**

**Another set of experiments** was conducted using an entirely new method of control that extends **Raibert's State Space Memory Method** [213]. The State Space *Response Method* is a means of solving the complete nonlinear dynamics for a hopping system without having to do lengthy calculations or numerical integrations in real time. **Instead**, a large table is maintained in which are stored future state data. Each

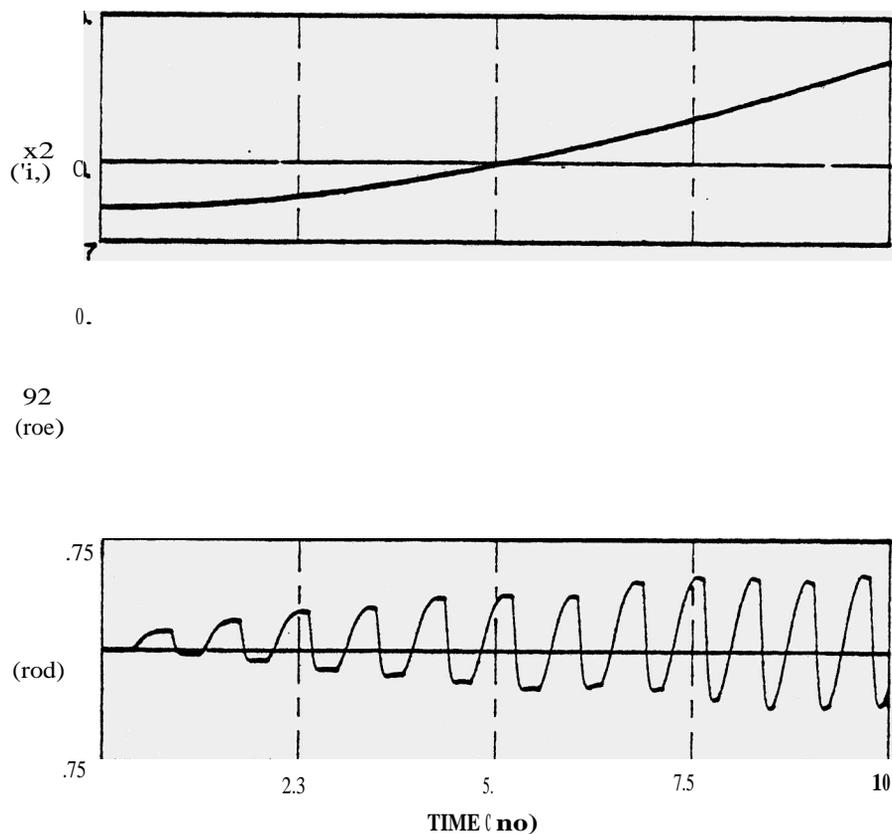


Figure 211: Sweep control with horizontal acceleration.

1:uv r  
-i: w

Figure 212 Cartoon of data from Fig. 241. 20 msec/doc, .6 sec/stick figure.

address into the table is a function of the current state and a control vector. At each such address is stored the corresponding future state.

The state space response method is a dynamic inverse method, in that knowledge of the relationship between desired system state and available control actions is used to choose an appropriate control. We motivate this approach by casting the balance problem for a hopping mechanism in the following terms:

Given complete state information at the time of TOUCH-DOWN, what leg-body angle maintained throughout stance will move the system to minimize the state error at the time of next LIFT-OF-0.

The state space response method is a way of predicting state at a future time,  $t_F$  based on augmented state at the present time,  $t_0$ . We define a multi-dimensional vector space  $V$  such that each dimension of  $V$  corresponds to one element of an augmented system state vector,  $X$ . The components of  $X$  are  $n$  state variables and  $i$  control variables. For each point in  $V$  there is a future state vector that predicts the state of the system at a specific time in the future,  $t_F$ . The present augmented state vector points to a future state vector.

If such a vector **field** is accessed at TOUCH-DOWN, and if the future state vectors correspond to the time of next LIFT-OFF, and if the  $i$  control signals are completely determined by their values at LIFT-OFF, then control is achieved as follows: At each TOUCH-DOWN the current state vector exclusive of the  $i$  control elements determines an  $i$ -subfield of  $V$ . By minimizing a performance index over this subfield a best future state vector is found. The location of the best future state vector in the subfield indicates best values for the  $i$  control variables.

When each dimension of  $V$  is quantized, this approach can be implemented with a finite memory. For  $n$  state variables and  $i$  control variables, each quantized to  $M$  values, there are  $M^i$  hyper-regions, each storing  $n$  values. A Nyquist like sampling rate applies to the selection of  $M$ . The table must be quantized at a fine enough level to capture the bandwidth present in the variations of future state.

At one event,  $t_0$  the state space response method makes predictions concerning another event,  $t_F$ . During the interval that separates these events the system control variables must behave in a restricted way they must vary over the interval with at most  $i$  degrees of freedom. That is, for each augmented state at  $t_0$  there is exactly one control trajectory during the interval. The question of finding suitable control functions of augmented state is an open problem.

**What will the state be at  $t_F$  for a given augmented state at  $t_0$ ? Such data may be obtained by** simulation, by evaluating closed form solutions, or by making measurements on a behaving system. Though it has not yet been attempted, data could be obtained by taking measurements from a physical, behaving system. Such a learning controller would benefit from experience gained in practice, and could adapt to changes in the mechanical characteristics of the system [213].

What has been described so far has no specific connection to legged locomotion. But let us ask, what happens if some parts of the mechanical system we are trying to control engage in very regular repeatable activity. Does that make the problem easier or reduce its dimensionality? Normally to control a system, we would have to include all state and control variables in the augmented state vector. However, for a locomotion system engaging in regular rhythmic vertical hopping, to first order the vertical state variables (eg.  $w, \dot{w}, y_2, \dot{y}_2, u_2$ ) always have the same value at TOUCH-DOWN and follow nearly the same trajectory throughout stance. Therefore these variables can each be quantized to one level rather than  $M$ , resulting in dramatic reductions in table size.

We have used the state space response method to control the planar hopper. Body angle  $\theta_1$ , body angular rate  $\dot{\theta}_1$ , and horizontal velocity  $\dot{x}_2$  are state variables that access a table,  $n=3$ . Leg angle  $\theta_2$  is a control variable,  $i=1$ . These variables index a 4 dimensional space. Each dimension of the memory is quantized to nine levels,  $M=9$ , requiring that  $nM^i = 19,683$  values be stored. To compensate for such a coarse quantization, linear interpolation is performed when accessing the memory.

We obtained tabular data for these experiments by simulating a large set of TOUCH-DOWN - stance - LIFT-OFF cycles with systematically varied initial conditions. As in the earlier work on linear feedback, the angle between leg and hip,  $\theta_1 - \theta_2$ , is held constant during stance. Therefore, the controller determines a value for control variable  $\theta_2$  at TOUCH-DOWN, and its behavior until LIFT-OFF is determined by the augmented state vector, in this case a subvector,  $[01,021]$ .

Use of the table requires that a search be performed for the **hype-region** containing the state vector that minimizes a performance index. We employed a quadratic index :

$$P_t = Q_1(\theta - \theta_d)^2 + Q_2(\dot{\theta} - \dot{\theta}_d)^2 + Q_3(x - x_d)^2 \quad (2.27)$$

where:

$Q_1, Q_2, Q_3$  are weights chosen by the user

$\theta_d, \dot{\theta}_d, x_d$  are desired values.

(tdCT\$)

XI c

I

3.0 ; 10  
TIME

Figure 2-13: Drop. balance test using state space response method.

Figure 243 plots the body angle and horizontal position of the hopper for a drop balance test. In this test the hopper is dropped from a height of 0.3 m with an initial body angle of 0.3 radians. The task level set points are  $\theta_d = 0, \dot{\theta}_d = 0, x_d = 0$ . Under control of the state space response method desired foot placement for the impending landing is repeatedly calculated at 10 msec. intervals from PEAK until TOUCH-DOWN. After TOUCH-DOWN the desired leg-body angle is no longer adjusted. In this test no attempt is made to control horizontal position,  $x$ . A vertical posture with no horizontal motion is attained in about 6 sec.

The state space response method was used to control a lateral step in position. Figure 244 shows a translation in which  $x_2$  was controlled indirectly through  $x$ . Unlike results from the linear method, here horizontal velocity is precisely controlled. Compare 2-14 to Figure 27-

The computational costs of using the state space response method center on search for the state that minimizes the performance index, and interpolation once the correct vector is found. No time is spent evaluating equations of motion directly.

As we said earlier, it is not necessary that the control variables be constant during stance, only that they do not vary throughout state space with more degrees of freedom than are represented in the table. This means that control signals are perfectly acceptable provided control during stance is completely determined

xt

62 ::

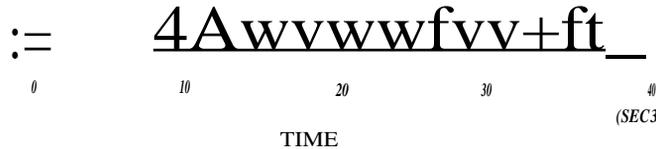


Figure 214: Lateral step controlled by state space response method .

by state at TOUCWDOWN.3

We are exploring a form of control that combines our work on the state space response method with our work on stance control. As before, foot placement at TOUCH-DOWN is determined from the state space response table. Rather than hold the hip angle constant during stance, however, the leg is swept through a region determined by a function of horizontal velocity at TOUCH-DOWN .

Performance using this method is not very good. In fact, we have not yet gotten good behavior from this type of control. Our diagnosis is that good stance control requires an additional degree of freedom in control that reflects the relationship between desired and actual horizontal velocities. You'll notice *that the linear stance control technique that worked so well permits the difference between actual and desired horizontal velocity to affect the sweeping rate. We are planning to implement a controller that includes this degree of freedom.*

#### 2.2.2.4 Polynomial Approximation to State Space Response Table

We have shown the state space response method to be an effective approach to control of non-linear dynamic system with few state and control variables. However, the memory requirements for this approach become severe in larger applications. *With this* in mind, we have asked the questions, "Can the data in the state space response tables be approximated adequately by analytic functions of the state variables? If so, with many fewer coefficients than are in *the original tables*?" We have undertaken to evaluate the use of polynomial surfaces that approximate the tabular data.

Given  $N = n + 1$  state and control variables, polynomials are constructed which map points of the augmented state space to estimated future state vectors. Each of  $n$  polynomials minimizes the total square error for the variable it approximates across all data points in the state space response memory .

3Actually, there is **another** practical limitation. Since interpolation is necessary to accomplish good **control with tables of finite** size, it is also required that small variations in state result in small **changes in control**. This is part of a **more general consideration that governs the coarseness with which the state space response memory can be divided.**

Let A be a matrix in which each row contains values of the N state and control variables; let B be the matrix which contains future values of the state variables in corresponding rows. The matrices A and B then form a data structure for the state space response memory. Give a sequence of distinct terms of the form:

$$\langle i_1^{12} x_2^{13} x_3^{14} \dots x_4^{N+1} x_3^{M3} x_4^M \rangle \quad (2.28)$$

determine a row of the M-column matrix C by evaluating these terms at the values defined by the same row of A. Then

$$(C^T C X = C^T B) \quad (2.29)$$

is a linear system whose solution X contains, in each column, the coefficients of a least squares polynomial which estimates the values in the corresponding column of B [234]. The polynomial is, of course, determined by the choice of the exponents in the above sequence.

We have tested the use of 'least squares' polynomials in control of the simulated one legged hopping machine. In this case  $\theta_2$ ,  $\dot{\theta}_2$  and  $i_2$  are the independent variables and future values of  $\theta_2$ ,  $\dot{\theta}_2$  and  $i_2$  are the variables to be approximated.

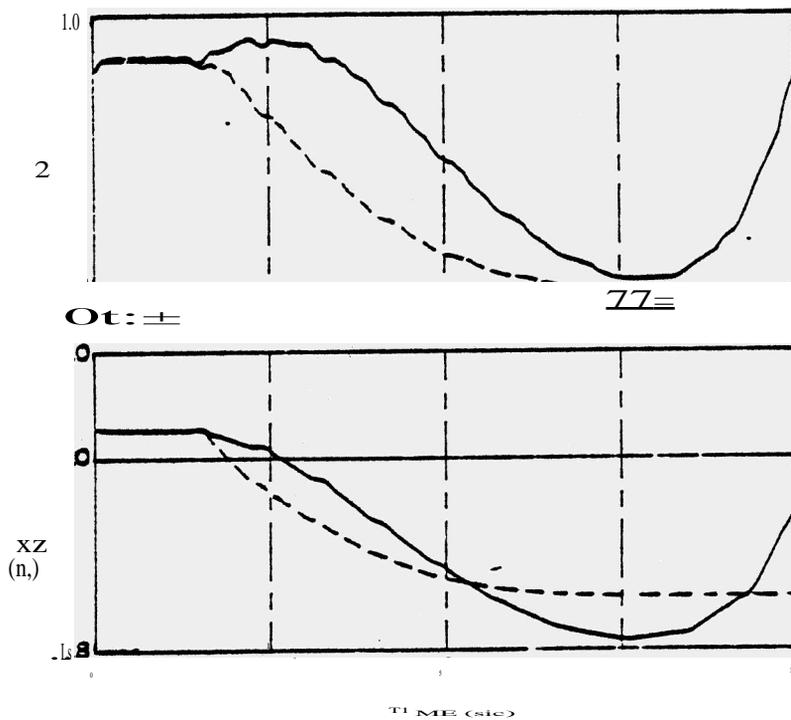


Figure 215: Drop balance test controlled by 86 term polynomial. Solid lines show results under control of polynomial approximation. Dotted lines are results using original tabular data.

Several polynomials have been tested

- A 70 term polynomial consisting of those terms where the sum of the exponents of the four independent variables is less than or equal to 4. The root mean square errors across the 5421 points in the state space memory were 0.961, 4.92 and 15.9 for  $\theta_2$ ,  $\dot{\theta}_2$  and  $i_2$  respectively. The trajectory of the hopping machine diverged grossly from that determined by the table look-up based control system.

- The 70 term polynomial was augmented with 16 additional terms consisting of a limited selection of fifth order terms. The RMS errors decreased somewhat to 0.905, 4.83 and 12.9 for the 86 term polynomial. This change did not significantly improve the control system's performance in the drop balance test. The results are illustrated by the trajectory plotted in Figure 2-15 where it is compared to the comparable trajectory for the table-based system.
- The state space was divided into 16 subregions according to combinations of the signs of the four independent variables. The same 86 terms were fit to the data in each of these subregions. The RMS errors were reduced somewhat to 0.223, 3.86 and 9.42. The resulting performance of the control system was disappointing, however, since storage requirements for the coefficients were increased by a factor of 16 over the previous case. Among other problems, this piecewise 86 term polynomial had discontinuities near the interregion boundaries. Various other divisions of the state space were tested using this approach, including overlapping regions. Problems were encountered when systems were singular because of small numbers of data points in certain subregions. In no case was the fit adequate for stable control of the simulated hopping machine -
- A polynomial was constructed using all terms with exponents of the four independent variables between 0 and 4. This implies 625 terms and hence a linear system of order 625. Such a system is too large to solve "in core" on a DECSYSTEM 20. It was therefore necessary to write software paging to do the Gaussian elimination. The system was successfully solved in about 20 hours of CPU time. The resulting fit was clearly superior to the earlier ones; the RMS errors were reduced to 0.246, 0.172 and 0.325. Figure 216 plots a cross section of the polynomial surface along with values from the state space table. The remaining errors still resulted in inadequate control, however. This can be seen in Figure 247. The polynomial-based control system approached the set points along a path similar to that determined by the table-based control system. However when the set points were reached, the polynomial system drifted and finally became unstable -

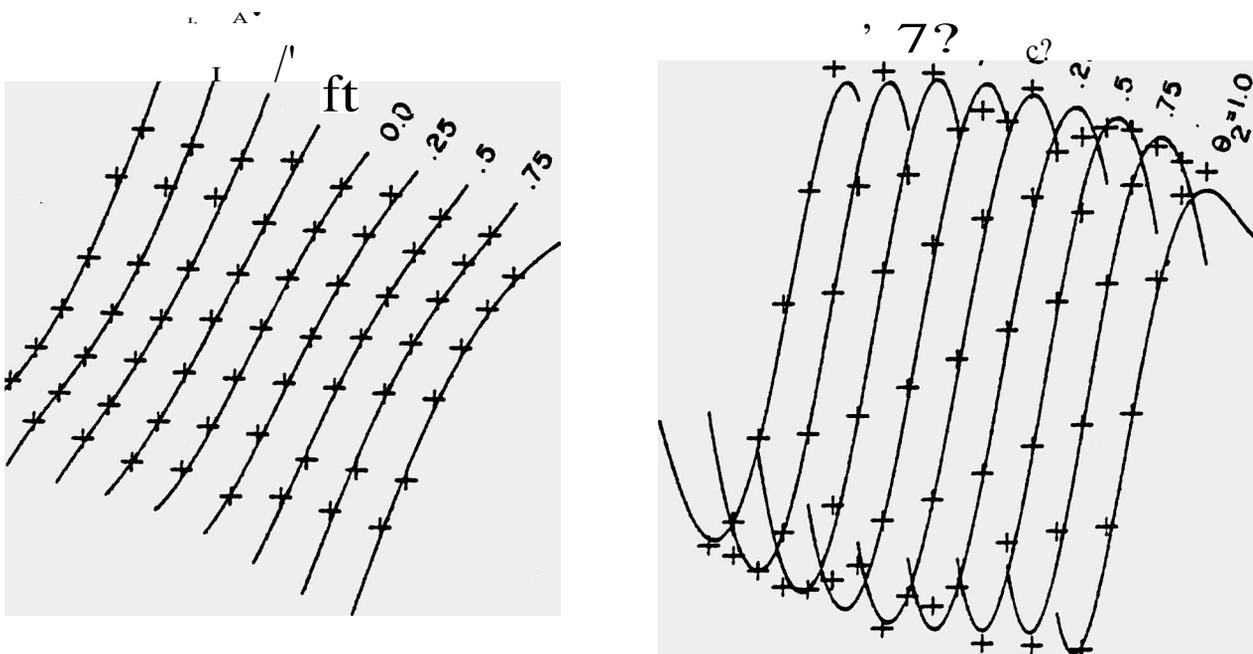


Figure 216: Cross section through response space that compares tabular data to 625 term polynomial. Slice of response space specified by  $x_2 = 0$ . Plotted on ordinate are: Left)  $x_1$  Right)  $x_2$ .

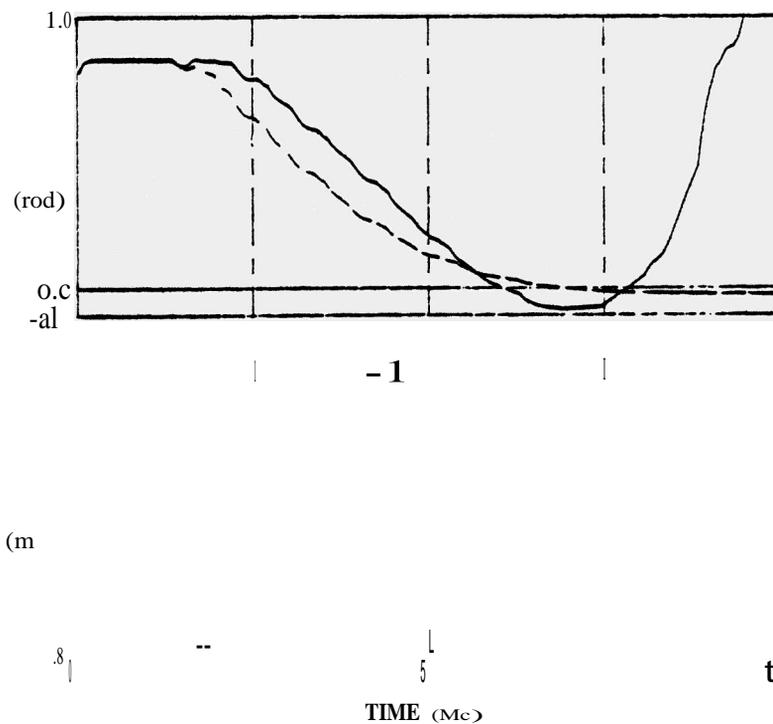


Figure 217: **Drop** balance test **under control of** 625 term polynomial .

**Keep in mind that the time required to determine the coefficients of the polynomial does not limit the usefulness of the approach in a strong way, provided evaluation of the polynomial can be accomplished with adequate speed. However, indefinitely increasing the number of terms is not an effective approach since it becomes very expensive to evaluate the resulting polynomials, not to mention that the memory required to store the coefficients would eventually approach that required for the original state space tables.**

**The least squares approach looks promising, though further work is needed: sensitivity analysis, exploration of optimal partitions of the state space for piecewise polynomials, and testing of spline techniques for smooth approximation across subregions .**

### 2.2.2.5 Optimal Control I

**The feedback gains used in the linear methods describe above were chosen and adjusted by hand. Without a more formal selection method we have no way distinguishing between those performance deficits due to fundamental limitations and those due to poor choices of gain. The optimal control theory gives one rational methods for choosing gains. However application of the theory to the present problem is complicated by the non-linear dynamics and the non-holonomic nature of the locomotion problem .**

**As a first approximation to controlling the one-legged hopper, we consider a model with massless leg and study its control by means of linearization about a nominal trajectory. The linearized model will be posed in discrete time with a quadratic performance index, and this will be controlled by the standard theory involving a Riccati equation.**

**As one example of this method, consider the problem of applying hip torque while the hopper is on the ground in an attempt to bring it to an upright position. We assume that the foot strikes the ground and**

remains fixed at the origin. The assumption of a massless leg allows us to model the hopper as a system without energy loss, so we can take  $u_2$  to be identically zero. When  $w = w_0$ , the main spring is at rest, which we assume to be the case at TOUCH-DOWN and LIFE-OFF.

Let  $(x,y)$  denote the coordinates of the center of mass of the body. When the hopper is hopping in place, we have (with  $u_1=0$ ):

$$\ddot{y}(t) = -g \tag{2.30}$$

$$y(0) = w_0 + r \tag{2.31}$$

$$y(t) = \frac{g}{2} t^2 + w_0 t + r \tag{2.32}$$

where

$$a = \frac{g}{2}$$

$$c = \arccos\left[\frac{r}{Y(0)}\right]$$

$M$  is the body mass,

$k$  is the main spring constant,

$t=0$  is the time of TOUCH-DOWN ( $y[0]=w_0+r$ , if  $Y(0) < 0$ ).

The time of LIFE-OFF is

$$T = 2 \arcsin\left[\frac{r}{Y(0)}\right] \tag{2.33}$$

We take this trajectory as nominal and study deviations from it. Suppose  $(\tilde{x}(t), \tilde{y}(t), \tilde{u}_2(t))$  is another trajectory, and define

$$\tilde{x}(t) = x(t) - x_n(t),$$

$$\tilde{y}(t) = y(t) - y_n(t)$$

$$\tilde{u}_2(t) = u_2(t) - u_2(t)$$

Linearization around the nominal trajectory yields

$$\frac{k(w_0 + r - y)}{M} \tilde{y} = \frac{k(w_0 + r - y)}{m} \tilde{y} + \tilde{u}_2 \tag{2.34}$$

$$\dot{\tilde{x}} = \tilde{u}_1 \tag{2.35}$$

$$\frac{k(w_0 + r - y)}{l(y-r)} \tilde{x} + \frac{k r y t w_0 + r - Y}{l(y-r)} \tilde{x} = \tilde{u}_1 \tag{2.36}$$

$$\dot{X}(t) = \begin{bmatrix} PAX_{Ay} & .10 & \Pi \\ 1 & A(t) & \\ & [S(t)] & 0 \end{bmatrix} \quad (2.37)$$

where each submatrix in  $A(t)$  is  $3 \times 3$  and

$$\begin{bmatrix} \mathbf{w} \pm \mathbf{r} \\ M_w \end{bmatrix} \quad 0 \quad \begin{bmatrix} h(W0+r) \\ \bullet M(t) \end{bmatrix}$$

$$S(t) = \begin{bmatrix} 1 & & \\ & 1 & \\ & & 0 \end{bmatrix}$$

$$\begin{bmatrix} k_r CWQ \pm r - Y \\ l(i) \end{bmatrix} \quad 0 \quad \begin{bmatrix} k_r l w 0 \pm r - Y \\ l(i') \end{bmatrix}$$

$$\text{Let } B = \begin{bmatrix} 0 \\ 1 \\ 0 \\ 0 \end{bmatrix}$$

$L \quad J$

Then:

$$\frac{d}{dt} X(t) = A(t) X(t) + B u(t). \quad (2.38),$$

We want to control this system from  $t=0$  to  $t=T$ . Divide  $[0, T]$  into subintervals of length  $\mathbf{I}$  and let  $t =$

$k=0, \dots, n$ . Let:

$$X_k = X(t), \quad A_k = A(t), \quad U_k = U(t). \quad (2.39)$$

We have:

$$\dot{X}_k = (I + A_k) X_k + -B U_k. \quad (2.40)$$

Define:

$$Q_n = \text{diag} (A_1, \dots, X_{20}, 0, A_3) \quad (2.41)$$

$$R_k = I, \quad k=0, \dots, n-1. \quad (2.42)$$

To control the system so as to minimize  $\mathbf{x}^T \mathbf{Q} \mathbf{x} + \mathbf{E} \mathbf{u}$ , we let  $\mathbf{k}_k$  be given by the Riccati equation

$$\mathbf{P}_k = \mathbf{Q} \quad (2.43)$$

$$\mathbf{k}_k = (\mathbf{I} + \mathbf{A}_k)^T \left[ \mathbf{k}_{k+1} \mathbf{B} \mathbf{B}^T \mathbf{k}_{k+1} \mathbf{I} + \mathbf{A}_k \right]^{-1} \mathbf{k}_{k+1} \mathbf{A}_k, \quad \mathbf{k}_{k+1} = 0, \quad (2.44)$$

where

$\mathbf{k}_{k+1}(6,6)$  is the (6,6) element of  $\mathbf{P}_{k+1}$

Let:

$$\mathbf{L}_k = \mathbf{k}_{k+1}(6,6) \mathbf{B} \mathbf{k}_{k+1} \mathbf{A}_k. \quad (2.45)$$

**Then the** optimal feedback control law is given by:

$$\mathbf{u}_k = -\mathbf{L}_k^{-1} \mathbf{x}_k. \quad (2.46)$$

This control requires a minimum amount of calculation and so can be implemented in real time. More importantly, it will allow for simulation which should help determine the main features of the controlled system. It is also possible to apply this control law to models with legs of various masses to determine its robustness.

## 3. Physical Experiments

This section describes our laboratory work aimed at building and testing physical legged machines that locomote with dynamic stability. Our first project is the construction and control of the Planar Hopper, a machine with one leg similar to the ideal device described earlier. At the time of this writing the planar hopper is able to produce high quality vertical hopping, while our current effort focuses on achieving balance. Our second project is aimed at moving our work into the third dimension. Two designs for 3-D hoppers are presented, a short term design that is simple, and a more ambitious long range design. We also introduce experiments on high performance hydraulics that may be used in future legged vehicles .

### 3.1 Planar Hopper

Here our work on the Planar Hopper is described. We include a description of the mechanism, its sensors, and progress in controlling [it](#).

#### 3.1.1 Mechanism

Figure 3-1 is a diagram of the apparatus. The important features of this mechanism are a body, a leg, two internal bearings, a main spring, two pneumatic cylinders, and three air bearings.

Body	Most parts of the planar hopper are mounted on the body, or at least connected to it. The body is a set of parts machined from aluminum stock, with manifolding for distribution of compressed air, supports for the actuators, a place for sensors and electronics, and pillow blocks that support bearings for the leg.
Leg	The leg is a 0.5 m length of machined square aluminum tubing, with a rubber tip at the foot. The leg is connected to the body-with--a coupling freedom: the leg can translate along its long axis through the body, and rotate about one of its short axis with respect to the body .
Cylinders	Two double acting air cylinders of 1.0625" bore actuate the hopper. Each cylinder housing is attached to the body with trunion mounts, while the rods connect to the leg through a sliding collar. These cylinders are mounted in such a way that the sum of their lengths determines the distance between the sliding collar and the body, and the difference of their lengths determines the angle between leg and body.
Main spring	A metal compression spring fits over the lower leg. Its lower end is held in place by a bracket fixed to the leg, while its upper end indirectly supports the body through the sliding collar and cylinders. In parallel with the metal compression spring are two leather tension straps. They limit the maximum length of the metal spring .
Manifold and valves	Between two plates that form the body arc grooves and passages that form a manifold for distribution of compressed gas. Eight electrically operated solenoid valves mounted to the underside of the body control air flow to the cylinders. Each end of each cylinder is controlled by a pair of valves: one valve connects the cylinder to high pressure gas, the other connects it to atmosphere. When both valves of a pair are off no gas enters or leaves

**SLIDING AND  
ROTATING  
BEARING**

***SLIDING  
BEARING***

**SPRING**

**Figure 31:** Physical Planar Hopper.

that end of the cylinder. Each valve is separately controlled by one bit from the computer and by a transistor switch.

#### Air bearings and table

Motion of the entire *mechanism* is constrained to a plane by three air bearings and a table inclined to  $45^\circ$ , as shown in Figure 34b. Each air bearing is *attached to* the hopper by a self-centering bellows coupling through which air flows. Two air bearings are attached to the body, and one to the lower leg. The hopper is free to translate vertically and horizontally in the plane of the table, and to rotate about an axis perpendicular to the table. A second part of the table, perpendicular to and below the first part, acts as the support surface upon which hopping takes place.

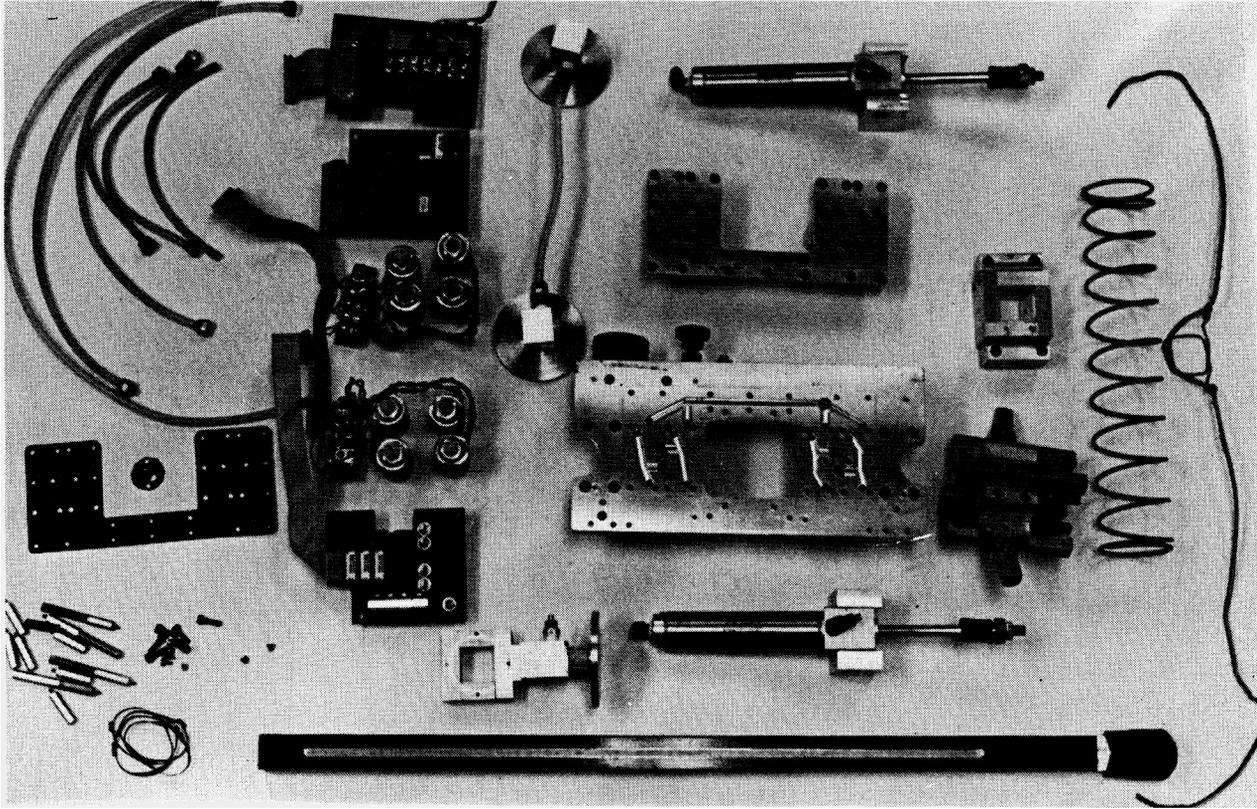


Figure 3-2: Parts that make up Planar Hopper: body, leg, spring, cylinders, valves, manifold, air bearings, and assorted miscellany.

The hopper operates as follows: Simultaneous in-phase rhythmic activation of the two air cylinders causes resonant excitation of the spring-body system. Hopping results when the leather straps restrict extension of the spring during oscillation. While the device is in flight differential control of the cylinders causes the leg to rotate relative to the body, thereby enabling selection of a new point for foot placement on subsequent landing.

### 3.1.2 Sensors

In the long run, the hardest problems in locomotion may be sensing problems. How can a system know where it is in space and where it is with respect to other objects without touching them? How can solid support points be chosen and dangerous ones avoided? And how can all this be accomplished in a system that is bobbing and weaving, oscillating and undulating at more than 40 km/hr? In biological systems these problems are solved by a variety of sensory systems that work together, vision being an important contributor-

We characterize the functions that sensors perform in controlling locomotion systems and other forms of robots:

- They provide information that permits control of actuators -
- They provide information that gives control over a system's state variables-
- They provide information about a system's interaction with its environment -

In order to control the planar hopper a number of measurements need to be made. At the lowest level the controller must know what each actuator is doing, the angle of the leg, and the length of the main spring - in our design this information is provided by two encoders and a potentiometer. At the next level the vehicle's dynamic state must be assessable. - Horizontal vertical and angular position of the body must be known, along with velocity. A rate gyro and sonar provide some of this information, a Seispot motion recording system fills in the gaps. We have not dealt with obstacle detection or avoidance, nor with irregular terrain. The following is a list of sensors that currently work, or that are being implemented.

**Encoders** A linear encoder is mounted on each of the bearings that move along the leg. Number 1 is mounted on the leg-body coupling, number 2 is on the sliding collar at the top of the spring. These electro-optical devices and their support circuitry count bars of a 1. mm/cycle square wave pattern affixed to the leg as the leg passes by. Encoder 2 gives infoation about compression of the main spring. Together the enCode give the separation between the body and-sliding collar.

#### Body potentiometer

The coupling between leg and body is instrumented with a potentiometer - that measures hip angle. The body potentiometer and linear encoders provide measurements from which the length of each air cylinder can be calculated :

$$\alpha \quad \{1 - w(t) \cos(p) - l_4 \sin(cp)\}^2 + \{l_2 + w(t) \sin(p) - l_4 \cos(p)\}^2 \quad (3.1)$$

$$\alpha \quad \{-1 - w(t) \cos(p) + l_4 \sin(97)\}^2 + \{l_2 + w(t) \sin(p) + l_4 \cos(p)\}^2 \quad (3.2)$$

where

Figure 3-3 defines all variables

w(t) is obtained from the difference of the encoders

p is obtained from the potentiometer .

**Rate gyro** We have purchased an oscillating beam rate gyroscope with 0:04 deg/sec resolution to provide measurements of body angle,  $\theta_2$ , and body angular rate  $\dot{\theta}_2$ . It will mount on the main body along with support electronics.

#### Foot potentiometer

During stance on level terrain it is possible to measure leg angle  $\theta$  with an instrumented foot. This is done with a potentiometer in the ankle. Eric Saund of Caltech constructed such a foot that serves as a prototype.

**Sonar** A way to measure altitude  $y_2$  and get additional body angle data  $\theta$  is to use a pair \*of down looking sonar sensors. Figure 3-4 shows the scheme we are impementing. It combines Polaroid sensors and drive electronics with custom electronics of our own design.

We are not letting the time it takes to implement these sensors delay our work on control. A commercially available measurement system, Seispot, provides the information needed for control in a temporary way. Seispot is an electrooptical system that records the paths of electronic markers as they move through space. The markers are infrared LEDs that are attached to the subject. A transducer generates x and y analog signals that specify the average location of light focused on its surface. The entire system is comprised of cameras containing the solid state sensors, a controller that turns on each of 30 LEDs in sequence every 3 msec, a multiplexer that separates the digitized signals into 30 coordinate pairs, and a computer interface. Use of two cameras permits 3-dimensional localization of the LEDs.

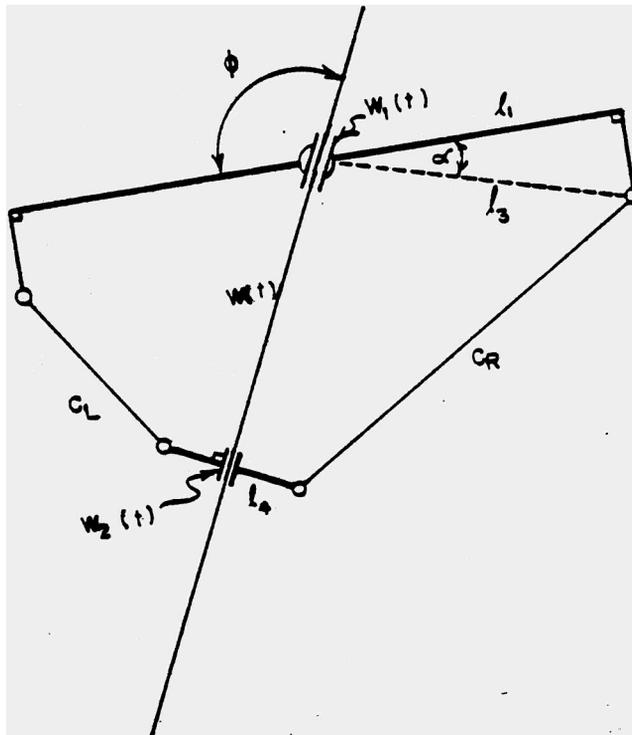


Figure 33: Kinematics of Planar Hopper .

T7H/d2

Figure 3'4: How sonar will be used to measure body altitude and body angle.

As we said, Selspot provides feedback for control experiments while other types of sensors are under development. In addition Scispot is a means of independently measuring and analyzing the performance of an experimental system. In 2r planar hopping experiments where one camera is adequate, a Selspot camera sits on a nearby tripod overlooking the inclined air table. LED are attached to the hopper in live locations as shown in Figure 3'5b.

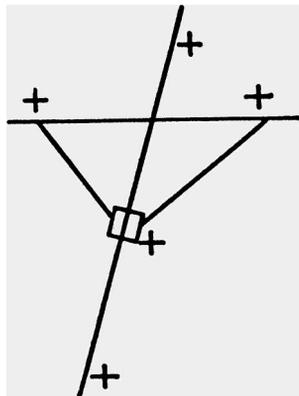
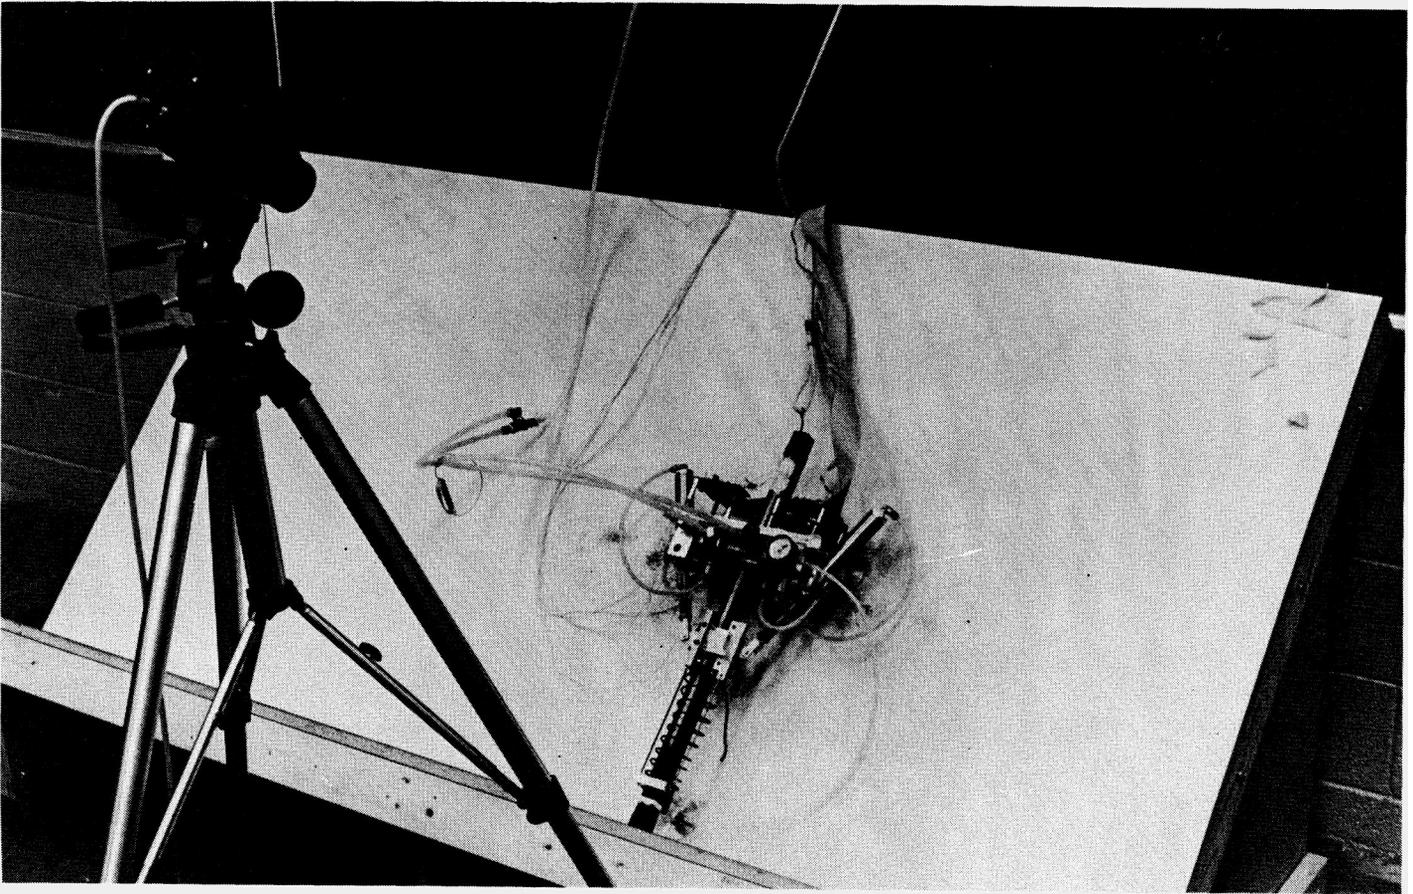


Figure 3-5: Top) Seispot camera overlooking planar hopper .  
Bottom) Pattern of LEDs on hopper.

### 3.1.2.1 SELSPOT filter

We have made three improvements to our Seispot system as sold to us by Selective Electronics:

- We built an LED scanner that permits five LEDs to be scanned at 2 KHz, six times the normal rate. These higher rates mean more precise measurements with less delay, and ultimately, better control.
- We implemented a microcoded digital filter that smooths each LED position value and calculates a smoothed velocity. This special purpose processor frees the control computer for other activity .
- We built a two port memory interface between Seispot and our computer's UNIBUS .

### 3.1.3 Results

After shortening some hose and increasing its diameter, after replacing a sliding linear bearing with a rolling one, after replacing a narrow spring that buckles with a wider one that does not buckle, and after replacing fixed air bearings with self-centering bearings, the hopper is hopping vertically. Recorded data for one test run are plotted in Figures 3-6 and 3-7. These plots look very similar to those obtained in simulation, eg. Figure 2-2. Though ever increasing hopping altitudes are not obtained, the foot clears the ground by more than 3 inches at PEAK.

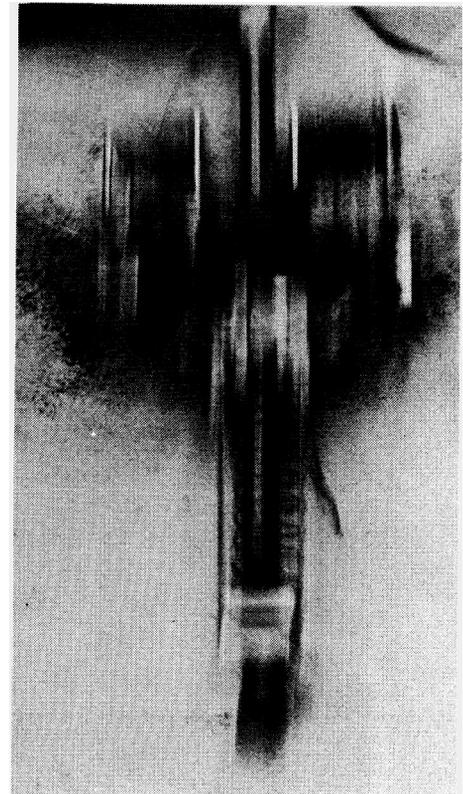
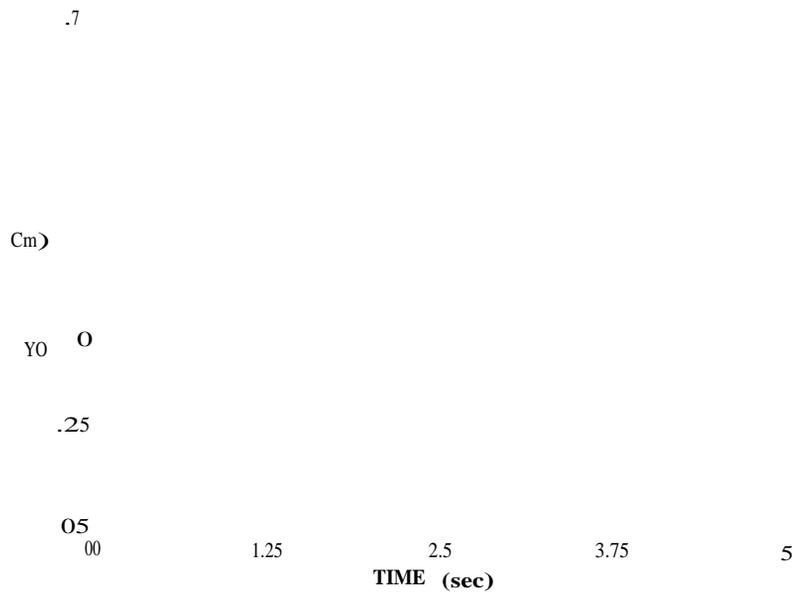


Figure 3-6: Vertical behavior of physical hopper. Left) As recorded by Selspot. Right) As recorded by camera with low shutter speed.

.6

Cm)

.Z\_\_

•L5•

"2

(rn/s.c)

Figure 37: Phase plot of vertical hopping data recorded from physical hopper with Seispot.

Balance during hopping has not yet been accomplished, though our progress in this area is good. We are now experimenting with a linear balance algorithm similar to the one explored in simulation. Completion of the Seispot filter has permitted us to try this even though the sonar and gyro sensors are still being developed.

The actual construction and testing of this physical system has taught us basic lessons we will remember in the future:

- . Unsprung mass in a leg must be minimized. If not, there are energy losses, large forces, and lots of noise-  
Spirals in compression buckle.
- . High performance -linear bearings require great care. Light. weight speed, and efficiency are not easy to combine in a linear bearing.
- . The importance of adequate gas flow is easy to forget. We replaced small fittings with larger ones, 1/4 inch hose with 3/8, small valves with larger valves, and larger valves with still larger ones.
- . When two actuators are mechanically coupled to control motions in two degrees of freedom, precise trajectory control is essential. Bang bang control is not appropriate in such systems.

We made some bad design choices early on that lead to this last lesson. We have had difficulty in separating the actions of the actuators into a vertical part. and a horizontal part. In our planar design, linear extension of the leg and torque about the hip are achieved by coordinating the actions of both actuators. They must move in precise synchrony in order to produce extension without hip torque, and hip torque without extension. Bang-bang pneumatic control of coupled actuators is not a good method for achieving such motions. Three solutions present themselves: find a better algorithm for using temporal modulation of on-off valves to approximate proportional control, replace the on-off valves with proportional servo valves, decouple the cylinders. Each of these options is being explored.

### 3.2 Design of 3-Dimensional Hoppers

Balance as it occurs in advanced legged systems is a 3-dimensional phenomenon. Therefore, if we are to fully understand balance and take advantage of it, we must extend our physical experiments into the third dimension where there are six degrees of freedom. We have begun to do so by designing experimental walking machines that embrace balance in 3-D, and that incorporate what we have learned from building and experimenting with the planar hopper. The goal of these designs is to create a vehicle for learning about balancing in 3-D in the coming year. A secondary goal is to generate preliminary ideas on what one leg of a multi-legged balancing vehicle should be like.

The objectives of the design are:

- To embody dynamic balance capability. The machine should be able to balance about a point contact with the floor, to hop in place, to translate in a preferred direction with high speed and efficiency, and to translate in any direction with less speed and efficiency.
- To achieve mechanical efficiency through proper tuning of the components of a spring-mass system. Hopping should be efficient.

The present intent is to leave *for later the control* of rotation about the vertical axis, and simply design with a large polar moment of inertia to minimize rotation.

The results are designs for three 3-D machines. Two are simple machines that function with circular symmetry. They are designed to hop in place or translate in any direction over relatively flat terrain. We will build at least one of them in the coming year. The third design is more advanced, reflecting our initial thinking about how to optimize a one-legged balancer for use in a multi-legged system. We believe that the basic role played by each leg in such a system is similar to its role in a monopod, but that the design must be biased for forward motion and for coupling between the legs.

#### 3.2.1 Simple 3D Hoppers

We have designed two simple 3-D hoppers. The first, shown in Figure 3-8 has a linear sliding leg that is gimbal mounted to a wide body and frame. The leg is comprised of a long double ended pneumatic cylinder with an extension at one end. The cylinder acts both as an actuator that changes length of the leg under control of an on-off valve, and as a spring that stores energy in gas compression during stance. Two hydraulic cylinders angle the leg with respect to the body in two degrees of freedom. These cylinders are controlled by flapper type proportional servo valves. The basic design has strong similarities to the planar hopper with the following important improvements:

- Motion that changes leg length is decoupled from motion that changes leg angle
- Bang-bang pneumatic control is no longer responsible for precise positioning.
- Energy is stored efficiently in *compressed gas rather than in a metal* compression spring that buckles.
- The only sliding bearing is that of the vertical actuator -- since there are three points of support there should be little binding.

The second design, shown in Figure 3-9, features a leg with all rotary joints. Two hydraulic cylinders with proportional servo valves control hip rotation in two directions. The angle of the entire leg is changed by these actuators. The knee incorporates two gears that act as an angle splitter so that the upper and lower legs

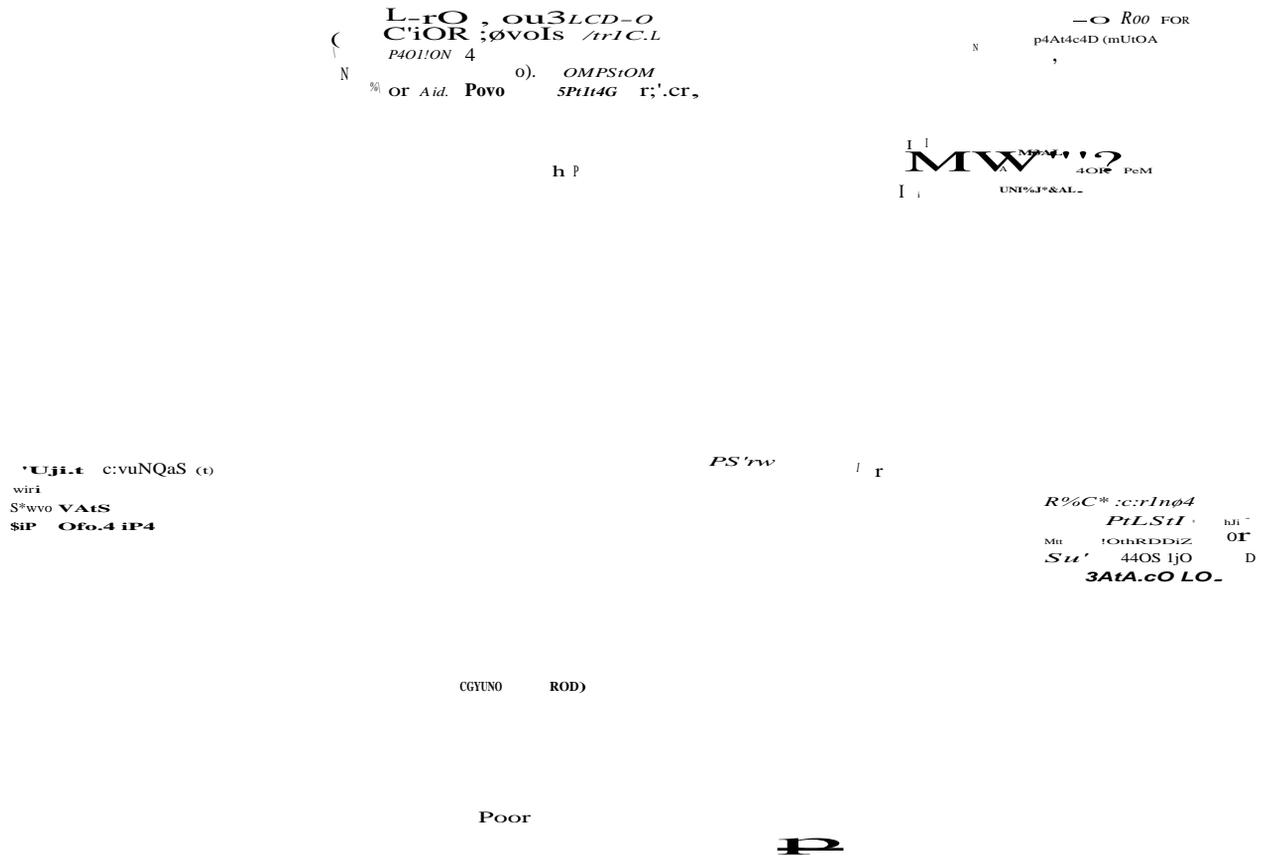


Figure 38: Simple 3-dimensional hopper with linear leg action.

fold at the same rate. Acting with the parallel-bar mechanism of the thigh, this angle splitter causes upper and lower legs to maintain equal angles with respect to the rotating portion of the hip. This linkage structure permits a single actuator to produce linear foot motion. The third actuator is a hydraulic cylinder working through a tension spring to lengthen and shorten the leg.

The basic difference between these simple 3-D machines is the method for obtaining linear leg motion: one uses the linear bearing of a pneumatic cylinder, the other uses gear and cable linkages. Both designs use a pair of precisely controlled hydraulic actuators to control leg angle, and both use a third actuator to change leg length. Neither will carry its own power supply nor its own computer they will connect with hoses to a stationary hydraulic power supply, and with wires to an off board computer. An on board accumulator will guarantee adequate control response and minimize peak flow rates through the umbilical. Some analog hardware will be present on board to support joint sensors, a set of rate gyros, and force sensors.

It is anticipated that a large amount of tuning of the mechanism and controls will be required before effective locomotion is achieved. To facilitate this, it is planned to build an arm, or other restraint device, to which the machine will be attached. This will enable development of hopping in stages: hop in place while externally stabilized, balance in two dimensions, balance in three dimensions. This approach will also help us to observe, measure, and understand the various phenomena occurring during each behavior.

Construction of the 3-D hopper will be from both standard components and parts we manufacture in the CMU machine shop. Aluminum, particularly tubing, will be used to minimize weight. Standard hydraulic and pneumatic actuators and valving are planned. Rubber band stock will be used for springs due to its light weight and ease of adjustment.

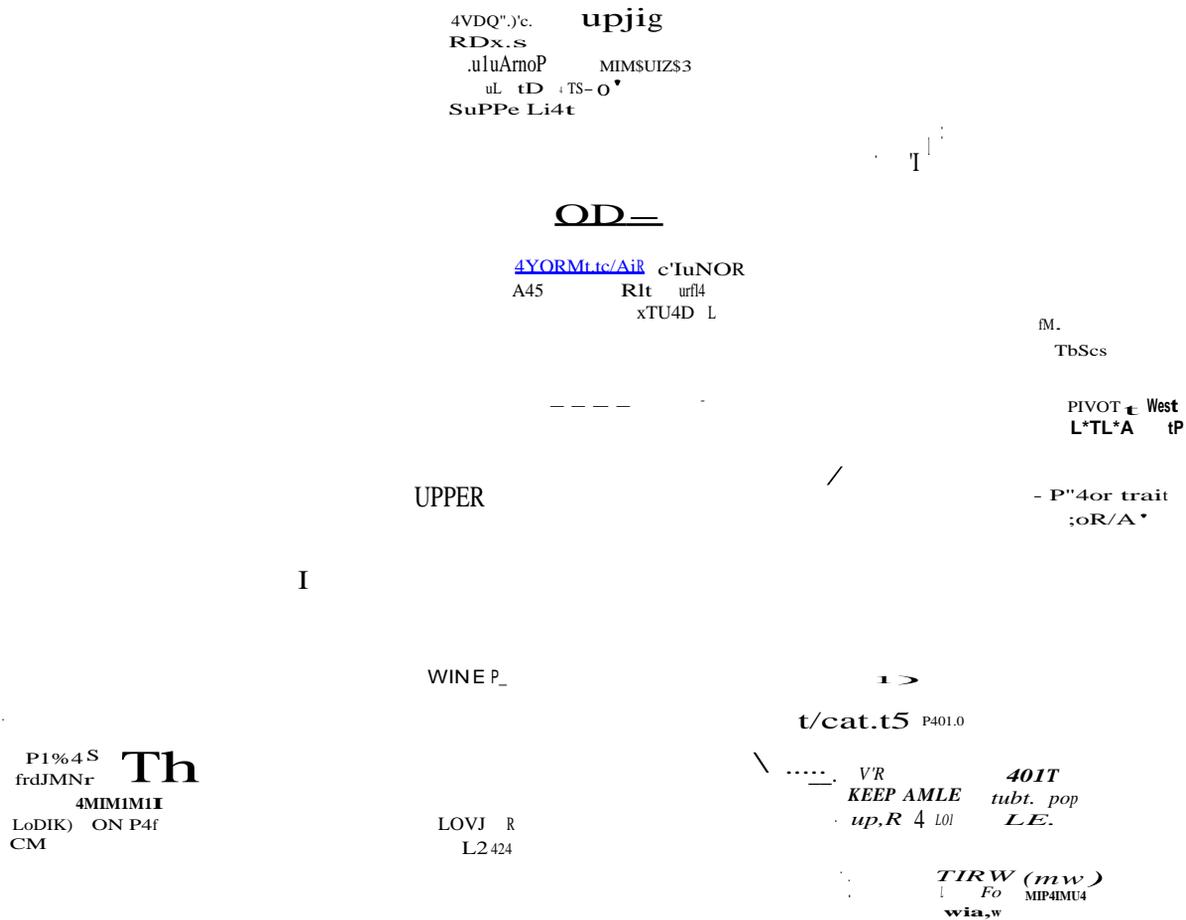


Figure 3-9: Simple 3-dimensional hopper with articulated leg.

### 3.2.2 Advanced 3D Hopper

The idea of a one legged hopping machine is important *for* legged locomotion not because one legged vehicles will come into wide spread use, but because dynamically balanced multi-legged vehicles will incorporate principles revealed by studying the, extreme one-legged case. Therefore it is useful, even at this early point in balance research, to contemplate what the legs of a running machine might look like. We ask this question by proposing a specific leg design that will provoke thought and discussion.

Figure 340 embodies the basic concept and more significant features of the advanced 3D leg as presently envisioned. The design begins with the basic structure of the simple articulated hopper: hip rotation is controlled about two axes, angle splitter in the knee, and parallel-bar linkage between hip and lower leg. To this has been added a foot. The lower leg and spring form a linkage which tends to keep the foot parallel to the upper leg. Thus, extension and contraction of the three elements of the leg can be controlled by a single actuator. The considerable elasticity of this spring will be adjustable in order to make testing easier.

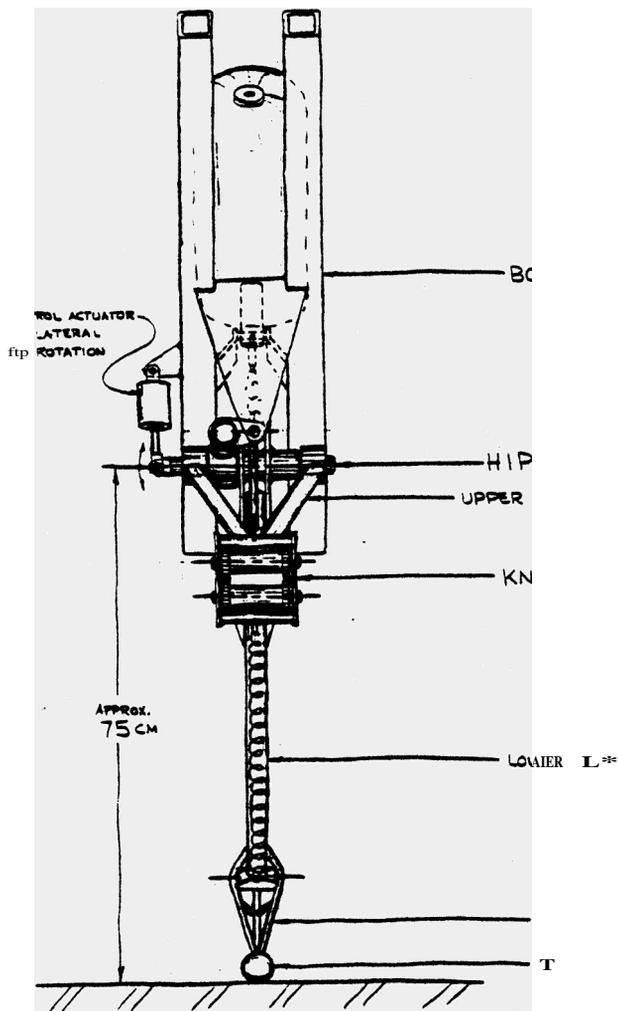


Figure 3IO: Preliminary leg design for tnu&'legged balancing vehicle.

The design incorporates **four hydraulic actuators**, two that **balance** and two that **supply propulsive energy**. Fore and **aft rotation of the hip** is controlled by an actuator in series with a spring. During steady state **hopping, the leg will swing at its resonant frequency, requiring only small amounts of energy from the actuator to maintain the motion**. This arrangement of spring and actuator is based on Ivan Sutherland's idea for a *tuningfork* quadruped. A second actuator produces **fine fore and aft motions by rotating the knee**. A *third* actuator, also in series with a **spring, acts on the upper leg to cause the leg to lengthen and shorten**. The angle splitter and parallelogram linkages **cause the action of this cylinder to move the toe along a straight line that passes through the hip**. Operating directly **on the hip, a fourth actuator causes lateral displacement of the entire leg.**

An articulated, three element leg has been chosen as having distinct performance advantages over other arrangements. Compared to linear sliding pogo stick designs, **the articulated leg has the following advantages:**

- Sliding joints are **eliminated, thereby reducing inefficiency and fabrication problems.**
- **Unsprung mass is minimized by using a series of jointed masses in the leg at TOUCHDOWN only the toe is unsprung.**

- It is easier to match characteristics of springs and actuators by means of adjustable lever arm lengths .
- All springs and actuators act in tension, eliminating the buckling limitations associated with compression springs.
- The design can be optimized for unidirectional travel .

It is significant that most creatures in nature that are capable of reasonable speed on land and over uneven terrain employ the same basic three-element articulated leg design. Even though an articulated leg requires only three degrees of freedom, as provided by the simple hoppers of the last section, the addition of a lower element improves performance in three ways :

1. It reduces the unsprung mass .
2. It causes the ground force to act nearly through the knee, minimizing the moment at this generally fragile joint.
3. It permits energy storage in the Achilles tendon, which has been found significant in locomotion of many animals, most *notably* the kangaroo [3, 4].

### 3.3 High Performance Hydraulics

At the same time that actuator technology is a crucial component for high performance mechanisms it comprises an important technological weakness in current man-made robots. Most have poor power to weight and force to weight ratios and most are very inefficient. We think that hydraulic cylinders with hydrostatic bearings on piston and rod offer a promising new technology for legged systems. Our plan is to *use this* technology to implement *a mechanism simulator* that can imitate combinations of masses, springs and dampers of various sizes. Our purpose is to understand the limitations and strengths of this technology so that it may be applied to our loco' motion projects if appropriate.

We have purchased equipment for the experiments: a hydraulic cylinder with hydrostatic bearings, position, velocity, and force sensors, a Moog servo valve, and a hydraulic power supply. (See Figure 3-11.) Once this equipment is operational, our plan is to simulate a mass-spring-damper system with a variety of constants: large mass, small mass, negative mass, hard spring, soft spring, etc. Figure 3 -12 describes the experimental setup.


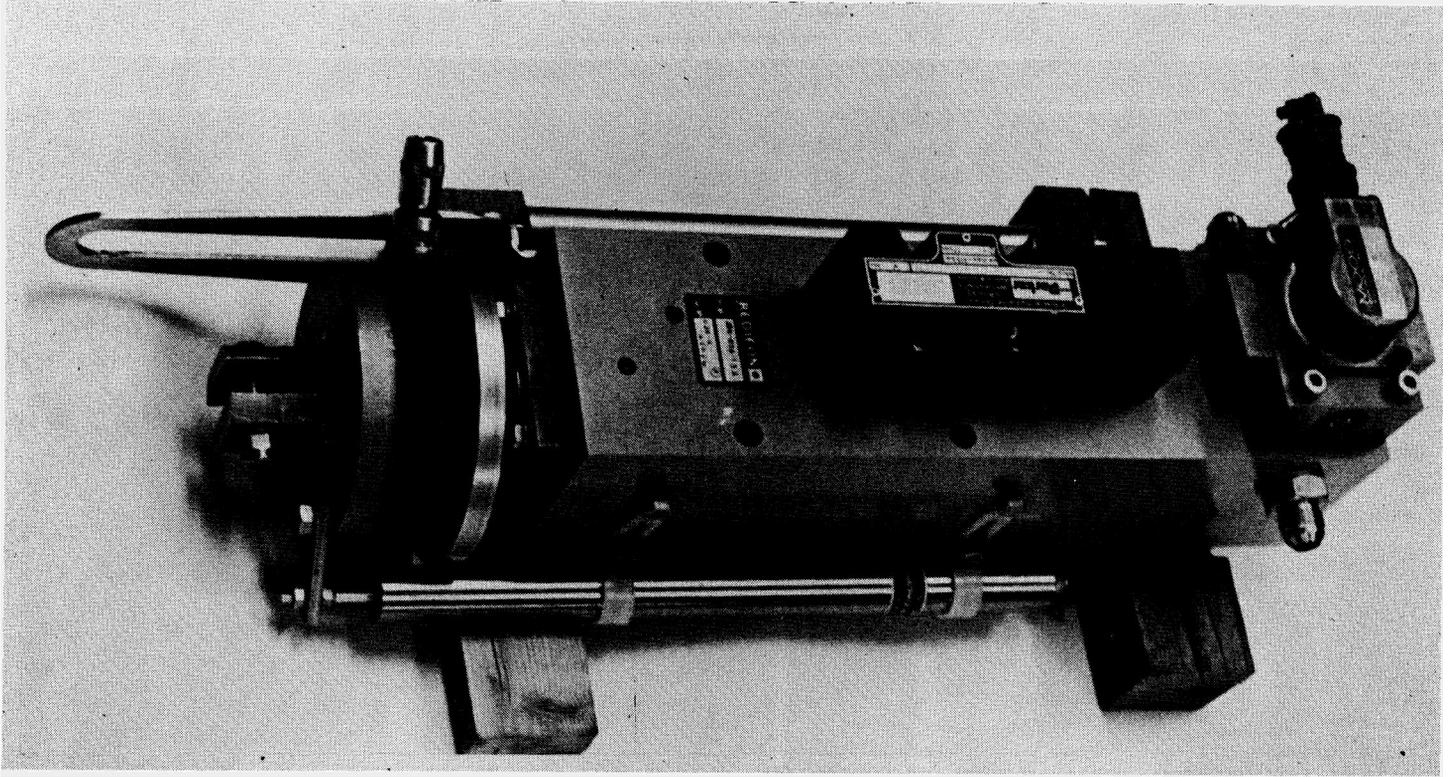


Figure 341: Photograph of hydraulic cylinder, position sensor, velocity sensor, and force sensor.

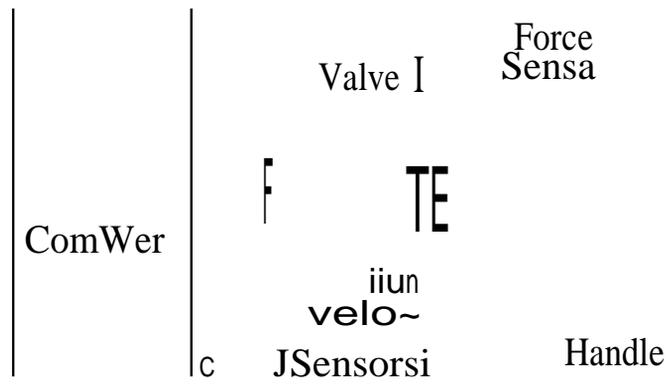

**Sff41I**  
**NkW**

Large

**Spring**  
**and**  
**Damper**

Figure 312:• **Diagram** of experiments **with high performance hydraulics**.

## II Equations for One-Legged Planar Hopper

$$x_1 = x_0 + r_1(O1\sin(O1) + O\cos(O1)) \quad (3.3)$$

$$y_1 = y_0 - r_1(O1\cos(O1) - O\sin(O1)) \quad (3.4)$$

$$y_2 = y_0 + r_2\cos(O2) - wO1\sin(O1) - wO\cos(O1) \quad (3.5)$$

$$-r_2(O2\sin(O2) + O\cos(O2)) - 2rO1\sin(O1) \\ - wO1\sin(O1) + wO1\cos(O1) - wO\sin(O1) \quad (3.6)$$

$$+ r_2(O2\cos(O2) - O\sin(O2)) + 2rO1\cos(O1)$$

$$M_{11} = F_{TCO}(O1) + F_{NSin}(O1) - M_1g \quad (3.7)$$

$$M_{11} = F_{F1Sin}(O1) - F_{NCOs}(O1) \quad (3.8)$$

$$I_{11} = Fr_1\cos(O1) + Fr_1\sin(O1) - FN(wr_1) - u_1(t) \quad (3.9)$$

$$M_{22} = F_{TCOs}(O1) - F_{NSin}(O1) - Mg \quad (3.10)$$

$$M_{2i2} = F_{TSin}(O1) + F_{NCOS}(O1) \quad (3.11)$$

$$I_2 = Fr_2\sin(O2-O1) - FNr_2\cos(O2O1) + u_1(t) \quad (3.12)$$

where:

$(x_0, y_0)$  are the coordinates of the foot.

$(x_j, Y_j)$  are the coordinates of the leg's CO.

$(x_2, y_2)$  are the coordinates of the body's CG.

$F, F'$  are the vertical and horizontal forces on the foot.

$F_T, F_N$  are tangent and normal forces between the leg and body.

Eliminating  $x_1, y_1, x_2, y_2,$  and  $F_N$ :

$$\cos(O1)(M_2W_w + I_1)O_1' + M_2r_2W \cos(O2)O_2' + M_2Wx_0' + M_2W \sin(O1)w' = \quad (3.13)$$

$$WM_2(O_12W \sin(O1) - 2r_1w \cos(O1) + r_2O_22\sin(O2) + r_1O_12\sin(O1))$$

$$r_1F_{COs}(O1)2' + \cos(O1)(r_1F_{SIn}(O1) - u_1(t)) + F_{KW} \sin(O1)$$

$$\sin(O1)(M_2W_w + I_1)O_1' - M_2r_2W \sin(O2)O_2' + M_2Wy_0' + M_2W \cos(O1)w' \quad (3.14)$$

$$WM_2(O_12W \cos(O1) \pm 2O_1w \sin(O1) + r_2O_22\cos(O2) + r_1O_12\cos(O1) - g)$$

$$+ r_1F_{COs}(O1)\sin(O1) - \sin(O1)(r_1F_{SIn}(O1) - u_1(t)) + F_{KW} \cos(O1)$$

$$\cos(\theta_1)(M_1 r_1 W - 11) \theta_1 + M_1 W x_0 = \quad (3.15)$$

$$W(M_1 r_1 O_1 2 \sin(\theta_1) - F_K \sin(\theta_1) + F_X) - \cos(\theta_1)(F r_1 \sin(\theta_1) -$$

$$F r_1 \cos(\theta_1) - u_1(t))$$

$$-\sin(\theta_1)(M_1 r_1 W - 11) \theta_1 + M_1 W y_0 = \quad (3.16)$$

$$W(M_1 r_1 O_1 \cos(\theta_1) - F_K \cos(\theta_1) + F - M_1 g)$$

$$\sin(\theta_1)(F r_1 \sin(\theta_1) - F r_1 \cos(\theta_1) - u_1(t))$$

$$-\cos(\theta_2) \theta_1 11 r_2 \theta_1 + 12 w_8 2 = \quad (3.17)$$

$$W(F_K r_2 \sin(\theta_2 \theta_1) + u_1(t)) - r_2 \cos(\theta_2 - \theta_1)(r_1 F \sin(\theta_1) - r_1 F \cos(\theta_1) - u_1(t))$$

where

W =

$$w r_1$$

$$F_K = \begin{cases} K(w_0 - w + u_2) & \text{for } (V_0 - w + u_2) > 0 \\ K_2(w_0 * w + u_2) & \text{otherwise} \end{cases} \cdot B_w \quad (3.18)$$

$$F = \begin{cases} K G(x_0 y_0) & \text{for } y_0 < 0 \\ 0 & \text{otherwise} \end{cases} \cdot B_{G_x} \quad (3.19)$$

$$F = \begin{cases} K G y_0 & \text{for } y_0 < 0 \\ 0 & \text{otherwise} \end{cases} \cdot B_{G_y} \quad (3.20)$$

## 11. Simulation Parameters

$$M1 = 1 \text{ kg}$$

$$I_1 = 1 \text{ kg-m}^2$$

$$r1 = .5 \text{ rn}$$

$$= 1 \text{ m}$$

$$K = 900$$

$$K = 103 \text{ Nt/m}$$

$$K = 105 \text{ Nt/rn}$$

$$K = 104 \text{ Nt/m}$$

$$Q1 = 5.$$

$$M2 = 10 \text{ kg}$$

$$I_2 = 10 \text{ kg}$$

$$r2 = .4 \text{ rn}$$

$$K = 60$$

$$B = 125 \text{ Nt-sec/rn}$$

$$B = 75 \text{ Nt-sec/rn}$$

$$Q2 = Q3 = 1$$

### III. Legged Locomotion Bibliography

1. Agarwal,G.C., Berman,B.M., Stark,L, Lohnberg,P., Gottleib,G.L. "Studies in postural control systems : Parts I, II, and III." *IEEE ton Systems Science and Cybernetics ssc-6*, 2 (April 1970),116-132.
2. Aleshinsky, Zatsiorsky. "Human locomotion." *J. Biomechanics 11* (1978), 101408.
3. Alexander,R. McN. "The mechanics of jumping by a dog." *J. Zoo!., Lond 173* (1974), 549-573.
4. Alexander,R. McN., Vernon,A. "The mechanics of hopping by kangaroos (Macropodidas)." *I Zoo!., Lond , 177* (1975), 265-303.
5. Alexander,R. McN., Goldspink,G.. *Mechanics and energetics ofanimal locomotion..*, Chapman and Hall; London, 1977.
6. Alexander,R. McN. *J. Biomechanics 13* (1979), 383-390.
7. Alexander,R. McN. "Fourier analysis of forces exerted in walking & running." *J. Biomechanics 13* (1980), 383-390.
8. Alexander,R. McN. "Mechanics of bipedal locomotion." ,493-504.
9. Anderson,F.. *Registration of the pressure power (Iheforce) of the body on thefloor during movements*, especially verticaljumps , 1st Int. Seminar, Surich, 1967.
10. Andriacchi, Ogle, Galante. "Walking speed as a basis for normal & abnormal gait measurements." *J. Biomechanics JO* (1977), 195-200.
11. *Armstrong, W.W. Proc. of5zh World Congress on Theory of Machines and Mechanisms* (1979), 1343-1346.
12. Arutyunyan,G.A., Gurfinkel,V.S., Mirskii,M.L. "Organization of movements on execution by man of an exact postural task." *Biofizika 14*, 6 (1969), 1103-1107.
13. Bair,I.R.. *Patent No. 2918738. Volume: Amphibious walking vehicle., 1959.*
14. Bassmajian,J.V., Tuttle,R. Engineering of locomotion in gorilla and man. In *Control ofPosture and Locomotion*, R.B. Stein, K.G. Pearson, R.S. Smith, J.B. Redford, Eds., Plenum Press, New York, N.Y., 1973, pp. 500-609.
15. Beckett,R., Chang,K. : An evaluation of the kinematics of gait by minimum energy, *Biomechanics*, Proc. First Rock Island Arsenal Biomechanics Symposium, New York, April, 1967 -
16. Bekker,M.G.. *The evolution oflocomotion: A conjecture into thefuture ofvehicles. , 1961-*
17. Bekker,M.G. "Is the wheel the last word inland locomotion?" *New Scientist 17,248* (August 1961),406-410.
- 1& Bekker,M.G.. *Theory of Land locomotion*. University of Michigan Press, 1962.

19. Bekker, M.G.. *Introduction to terrain-vehicle systems*. University of Michigan Press, Ann Arbor, 1969.
20. Beletskii, V.V. "Biped locomotion dynamics 1." *Izv. AN SSSR. Mekhanika Tverdogo Tela* 10, 3 (1975), 314.
21. Beletskii, V.V. "Dynamics of two legged walking, II." *Izv. AN SSSR. Mekhanika Tverdogo Tela* 10, 4 (1975), 3-13.
22. Beletskii, V.V., Kirsanova, T.S. "Plane linear models of biped locomotion." *Izv. AN SSSR. Mekhanika Tverdogo Tela* 11, 4 (1976), 51-62.
23. Beletskii, V.V., Chudinov, P.S. "Parametric optimization in the problem of biped locomotion." *Izv. AN SSSR. Mekhanika Tverdogo Tela* 12, 1 (1977), 2535.
24. Beletskii, V.V. "Walking Control and Dynamics of a System with Two Legs."
25. Bessonov, A.P., Umnov, N.V.. *The analysis of gaits in six-legged vehicles according to their static stability*. Proc. Symposium on Theory and Practice of Robots and Manipulators, Udine, Italy, 1973 .
26. Bishop, Jerry E. Why Do Kangaroos Say to Their Friends, 'Let's Go to the Hop'? 1980 Wall Street Journal.
27. Brown, L.S.. *The right way to walk four-legged*,
28. Bryson, A.E., Ho, Y.C. . Applied Optimal Control, Xerox-Blaisdell, Mass., 1969 .
29. Buckett, J. *Design of an on-board electronic joint control system for a six-legged vehicle*. Ph.D. Th., The Ohio State University, Columbus, Ohio, March 1977.
30. Bumett, C.N., Johnson, W.. *Development of gait in childhood, Parts I and II*. Developmental Medicine in Child Neurology, 1971.
31. Burns, M.D.. *The control of walking in Orthoptera I leg movements in normal walking*. *J. Exp. Biol.*, 1973.
32. Camana, P.C. *A study of physiologically motivated mathematical models for human postural control*. Ph.D. Th., The Ohio State University, Columbus, Ohio, 1977 .
33. Camana, P.C., Hemami, H., Stockwell, C.W. "Determination of feedback for human posture control without physical intervention." 7 (1977).
34. Cannon, R.H., Jr. "Some basic response relations for reaction-wheel attitude control." *ARS Journal* (January 1962), 61-74.
35. Cappozzo, Maini, Marchetti, Pedotti. *Analysis of hybrid computer of ground reaction in walking*. Proc. IV Int. Seminar on Biomechanics, Philadelphia, Pa., 1973.
36. Cappozzo, Aurelio, et.al. "A General computing method for the analysis of human locomotion." - *J. Biomechanics* 8 (1975), 307-320.

37. Cappozzo, eLal. "Interplay of muscular & external forces in human ambulation." *J. Biomechanics* 9 (1976),35-43.
38. Carson, P.E.. *Walking tractor.*, 1958.
39. Cavanagh,P.R. *J. Biomechanics* 13 (1979), 397406.
40. Ceranowicz, A.Z. Decoupling and finite state control of a five link planar biped model standing on one leg. Master Th., The Ohio State University, Columbus, Ohio, 1977.
41. Ceranowicz,A.Z. *Planar biped dynamics and control. Ph.D. Th.*, The Ohio State University, Columbus, Ohio, 1979.
42. Ceranowicz,A.Z., Syman,B.F., Hemami,H.. *Control of conszrained systems of controllabiity index Iwo.* IEEE T. on Automatic Control, AC-25, 1980.
43. Chen, J.C. *Dynamics and stability of legged locomotion systems.* Ph.D. Th., Caltech, August 1981.
44. Cheng,LS. *Computer-television analysis of biped locomotion.* Ph.D. Th., The Ohio State University, Columbus, Ohio, December.1974.
45. Chow,C.K., Jacobson,D.H. Studies of human locomotion via optimal programming. Tech. Rept. Tech Report No. 617, Divn. of Engr. and Appl. Physics, Harvard University, October, 1970.
46. Chow,C.K., JacobsOn,D.H.. *Postural stability of liuman locomotion.* Mathematical Biosciences, 1972.
47. Cook,T., Cozzens,B. The initiation of gait. *In Neural control of locomotion*, Plenum Press, New York, 1976.
48. Corliss,W.R., Johnson,E.G. "Teleoperator controls." NASA SP-5070 (December 1968).
49. Cox,W.. *Big muskie. New in Engineering*, The Ohio State University, Columbus, Ohio, 1970.
50. Cruse,H.. *A new model describing the coordination pattern of the legs of a walking slick insect.* Biol. Cybernetics, 1979.
51. Dawson,T.J. "Kangaroos." *Scientific American* 237,2 (1977),78-89.
52. Dougan,S. "The angle of gait." 7 (1924),275-279.
53. Drillis,R., Contini,R. BodySegment Parameters. Tech. Rept. Technical Report No. 1166.03, New York University, New York, September, 1966.
54. Ehrlich,A.. Patent No. 1691233. Volume : Vehicle *propelled by Stepper* , 1928.
55. Elftman,H. "A cinematic study of the distribution of pressure in the human foot" *Anal. Rec.* 59 (1934), 481-490.
56. Elftman,H. "The basic pattern of human locomotion." *Ann. of N. Y. Acad. of Sci. Rec. Si* (1951),1207-1212.

57. Elftman,FL "Basic function of the lower limbs." *Biomedical Engineering (August 1967)*, 342345.
58. Engin,A.E. Experimental determination of the patello femoral joint forces. , 29th ACEMB, Boston, Mass., November, 1976.
59. Ewaid,B.A., Lucas,D.B., Ralston,H.J.. *Effect ofimmobiization of the hip on energy expenditure during level walking.*, UCSF Berkeley, **1961.-**
60. Farnsworth,R; Gait stability and control of a five link model of biped locomotion. Master Th., The Ohio State University, Columbus, Ohio, 1975..
61. Fitch,J.M., Templer,J., Corcoran,P. "The dimensions of stairs." *Scientific American* 231, 42 (1974).
62. Foley, et.al. "Kinematics of normal child locomotion." *J. Biomechanics* 12 (1979),**1-6.**
63. Fomin,S.V., Shtil'kind,T.I. "The concept of equilibrium of systems having legs." *Biofizika* 17,1 (1972), 131-134.
64. Frank,A.A. Automatic control systemsfor legged locomotion *machines. Ph.D. Th., Univ. of Southern California, Los Angeles, California, 1968.*
65. Frank,A.A., McGhee,R.B. "Some cOnsiderations relating to the design of autopilots for legged vehicles." *Journal ofTerramechanics* 6, 1 (1969), 23-25.
66. Frank,A.A., Vukobratovic,M.. *On the synthesis of biped locomotion machines. Proc. 8th International Convergence on Medical and Biological Engineering, Evanston, Illinois,. 1969 .*
67. Frank,A.A. "An approach to the dynamic analysis and synthesis of biped locomotion machines." *Med & Biol. Engng* 8 (1970), 465476.
68. Frank,A.A. "On the stability of an algorithmic biped locomotion machine," *J. ofTerramechanics* 8, 1 (1971),**41-50.**
69. Frank,A.A. "A method of coordinating the legs of the General Electric walking truck." , ECE-73-3 (1973).
70. Frank,A.A., Khandelwal. *On dynamics ofan elastically... JACC, Austin Texas, 1974.*
71. Gage,H. "Accelerographic analysis ofhuman gait." *ASME Winter Annual Meeting WA/HU*, 64 (1964), 137-152. .
72. Galiana,H.L., Milsum,J.H.. A mathematical *modelfor the walking human leg.* 21'st ACEMB, Houston, Texas, 1968.
73. Gannett,W.R.. *The peripod* , U.S. Army Weapons Command, Rock Island, Illinois, 1967 .
74. Garg,D.P. "Vertical mode human body vibration transmissibility." *IEEE Trans. Systems SMC-6*, 2 (February 1976).
75. Giralt,G.. *Multilevelplanning & navigation system for a mobile robot., August 1979.*

76. Golliday, C.L., Jr. *Toward development of biped locomotion control: planar motion of the kneeless biped standing and walking gaits.* Ph.D. Th., The Ohio State University, Columbus, Ohio, 1975.
77. Golliday, C.L., Jr., Hemami, H. "Postural stability of the two degree-of-freedom biped by general linear feedback." *IEEE Trans. on Automatic Control* AC-21, 1 (February 1976), 74-79.
78. Golliday, C.L., Jr., Hemami, H. "An approach to analyzing biped locomotion dynamics and designing robot locomotion controls." *IEEE Trans. Automatic Control* AC-22, 6 (December 1977), 963-972.
79. Graham, D. "Effects of circum-oesophageal lesion on the behavior of the stick insect *Carausius morosus*; I. Cyclic behaviour patterns." *Biol. Cybernetics* 32 (1979), 139-145.
80. Graham, D. "Effects of circum-oesophageal lesion on the behavior of the stick insect *Carausius morosus*; II. Changes in walking co-ordination." *Biol. Cybernetics* 32 (1979), 147-152.
81. Grillner, S. "The role of muscle stiffness in meeting the changing postural and locomotor requirements of force development by the ankle extensors." *Acta physiol. scand* 86 (1972), 92-108.
82. Grillner, S. "Locomotion in vertebrates: central mechanisms and reflex interaction." *Physiol. Rev.*, 55 (1975), 247-304.
83. Grillner, S. Some aspects on the descending control of the spinal circuits generating locomotor movements. *In Neural control of locomotion*, Plenum Press, New York, 1976.
84. Grimes, D.L. *An active multi-mode above knee prosthetic controller.* Ph.D. Th., Massachusetts Institute of Technology, June 1979.
85. Grundman, J., Seireg, A. "Computer control of a multitask exoskeleton for paraplegics." *On Theory and Practice of Robots and Manipulators - Second CISM-IF7'0MM Symposium, Warsaw (1976)*, 241-248.
86. Gubina, F. *Stability and dynamic control of certain types of biped locomotion.* IV Symp. on External Control of Human Extremities, Dubrov, 1972.
87. Gubina, F., Hemami, H., McGhee, R.B. "On the dynamic stability of biped locomotion." *IEEE Trans. on Biomedical Engineering* BME-21, 2 (March 1974), 102-108.
88. Gupta, S. Estimation of lower limb joint forces and moments using on-line measurements and computations.. Master Th., Ohio State University, Columbus, Ohio, March 1975.
89. Gurfinkel, E.V.. *Physical foundation of the stabilography.* Symposium International de Posturographic Srnoleniie, 1973.
90. Harris, R.L, Beath, T. "Hypermobile flat-foot with short tendo achillis." *J. Bone and Joint Surg.* 30-a (1948), 116-140.
91. Hartum, T.C. Biped locomotion models. Tech. Rept. Technical Report 272, The Ohio State University, Columbus, Ohio, February, 1971.
92. Hartum, T.C. *Computer implementation of a parametric model for biped locomotion kinematics.* Ph.D. Th., The Ohio State University. Columbus, Ohio, 1973.

93. Hatze,H. "A complete set of control equations for the human musculo-skeletal system." *J Biomechanics* 10 (1977),7-99-805.
94. Havill,J.R.,Ratcliff,J.W. A twin-gyro attitude control system for space vehicles. NASA Technical Note TN D-2419, August, 1964.
95. Heer,E.. *A Walking Vehicle Test Bed.*, 1979.
96. Hemami,H.. *Pole assignment by modefeedback Proc. 9th Annual Allerton Conference on Circuit and System Theory*, Evanston, Ill., 1971. •
97. Hemami,H., Weimer,F.C., Koozekanani,S.H. "Some aspects of the inverted pendulum problem for modelling of locomotion systems." *IEEE Trans on Automatic Control* AC-18,6 (December 1973),658-661.
98. Hemami,H., Weimer,F.C. Further considerations of the inverted pendulum. , Proc. of the Fourth Iranian Conference on Electrical Engineering, Pahiavi University, Shiraz, Iran, May, 1974, pp. 697 -708.
99. Hemami,H.. *Reduced order models for biped locomotion*. Proc. of 7th Pittsburgh. Conf. on Modelling and Simulation, Pittsburgh, Pa., 1976.
100. Hemami,H., Camana,P.C. "Nonlinear feedback in simple locomotion systems:" *IEEE Trans on Automatic Control* 21, 6 (December 1976).
101. Hemami,H., Cvetkovic,V.S.. *Postural stability of two biped models via Lyapunov second method Proc. of 1976 JACC*, West Lafayette, Indiana, 1976.
102. Hemami,H., Farnsworth,R.L. "Postural and gait stability of a planar five link biped by simulation." *IEEE Trans on Automatic Control* AC-22, 3 (June 1977), 452-458.
103. Hemami,H., Golliday,C.L.,Jr. "The inverted pendulum and biped stability." *Mathematical Biosciences* 34(1977),-95-110.
104. Hemami,H., Jaswa,V.C. "On a three-link model of the dynamics of standing up and sitting down." *IEEE Trans. Systems, Man, and Cybernetics* SMC-8, 2 (February 1978),115-120.
105. Hemami,H., Tomovic,R., Ceranowicz,A.Z. "Finite state control of planar bipeds with application to walking and sitting." *1 Bioengineering* 2 (1979), 477-494.
106. Hemami,H., Wall,C.,III, Black,F.O. "Single inverted pendulum biped experiments." *J. of Interdis. Model. and Simul.* 2(3) (1979),211-227.
107. Hemami,H., Wyman,B.F. "Modeling and control of constrained dynamic systems with application to biped locomotion in the frontal plane." *IEEE Trans on Automatic Control* AC-24,4 (August 1979), 526-535.
108. Hemami,H., Wyman,B.F. "Indirect control of the forces of constraint in dynamic systems." *Journal of Dynamic Systems, Measurement, and Control* 101 (1979),355-360.
109. Hemami,H. "A feedback on-off model of biped dynamics." *IEEE T. on Systems, Man, and Cybernetics* SMC-10, 7 (July 1980), 376-383.

110. Hemami,H., Robinson,DJ., Ceranowicz,A.Z. "Stability of planar biped models by simultaneous pole assignment and decoupling." *Int. J. Systems Science* 11, 1 (1980), 6575 -
111. Hemami,FL, Robinson,D,J., Ceranowicz,A.Z. "On stability , pole assignment and decoupling of some biped models." *Submitted to IEEE Trans. on Automatic Control* 0.
112. Hemami,H., Weimer,F.C., Robinson,C.S., Stockwell,C.W., Cvetkovic,V.S. "Analysis of some derived models of otoliths and semicircular canals." *1977JACC* 0.
113. Herman,B., Cook,T., Cozzens,B., Freeman,W. Control of postural reaction in man: the initiation of gait. *In Control of Posture and Locomotion*, R.B. Stein, K.G. Pearson, R.S. Smith, J.B. Redford, Eds., Plenum Press, New York, N.Y., 1973, pp. 353-388.
114. Hicks,J.H. The three weight bearing mechanisms of the foot. In in: *Biomechanical Studies of the Musculo-Skeleton System*, F.G. Evans, C.C. Thomas, Eds., , Springfield, Ill., 1961.
115. Higdon,D.T., Cannon,R.H.,Jr. On the control of unstable multiple-output mechanical systems. ASME Winter Annual Meeting, 1963 .
116. Hildebrand,M. "How animals run." *Scientific American* (May 1960),148-157.
117. Hildebrand, "Symmetrical gaits of horses." *Science*, 150 (1965), 701-708.
118. Hildebrand,M. "Analysis of the symmetrical Gaits of Tetrapods." *Folia Biotheoretica* 4 (1966), 9-22.
119. Hill,J.C. A dynamic model of the human postural control system. University of Rochester, Michigan, 1970.
120. Hirose,S., Umetani,Y.. *The basic motion regulation systemfor a quadruped walking vehicle*. ASME Conference on Mechanisms, Los Angeles, 1980 .
121. Howell,R.. *Speed in animal& Univ..of Chicago Press, Chicago, 1944.*
122. Hristic,D., Vukobratovic,M.. *A new approach to the rehabilitation of paraplegic persons*. , 1971.
123. Hughes,G.M. "The coordination of insect movements." *J. Exp. Biol* 29 (1952),267-285.
124. Jain,A.K. Measurement of gait in [children](#). *Tech. Rept. Tech. Note* No.1, The Ohio State University, July, 1972. Communication and Control Systems Lab, Dept. of Electrical Engineering .
125. Jain,A.K. A Study of regularly realizable gait matrices. Master Th., The Ohio State University, Columbus, Ohio,.
126. Jaswa,V.C. Dynamic stability and control of a three link model of a human being. Master Th., Ohio State University, Columbus, Ohio, June 1975 .
127. Jaswa,V.C. *An experimental study of real-time computer control of a hexapod vehicle*. Ph.D. Th., Ohio State University, Columbus, Ohio, 1978.
128. Johnston,R.C., Smidt,G.t. "Measurement of hip-joint motion during walking." *J. Bone & Joint Surg.* 51-A (1969), 1083-1094 .

129. Jones,R.L. "The human foot. An experimental study of its mechanics and the role of its muscle and ligaments in the support of the arch." *Am J. Anal.* 68 (1941),1-39..
130. Jones,F.W.. *Structure and function as seen in the foot*, Edition 2. Bailliere, Tindall and Cox, London, 1949.
131. Jones,G.M. "Observations on the Control of Stepping & Hopping Movements in Man." *J. Physiol* 219 (1971),709-727.
132. Jones,G. Melvill, Watt,D.G.D. "Observations on the control of stepping and hopping movements in man." *J. Physiol* 219 (1971), 709-727.
133. Juricic,D., Vukobratovic,M. "Mathematical modelling of bipedal walking system." *ASME Publication* 72- WA/BHF13 0.
134. Kahn,M.E.. *The near-minimum time control of open loop articulated kinematic chains*. Stanford Artificial Intelligence Memo #106, 1969. . .
135. Kato,I., Matsushita,S., Kato,K. A model of human posture control system. In *Advances in External Control of Human Extremities*, M.M. Gavrilovic, A.B. Wilson Jr., Eds., , Belgrade, 1969, pp. 443-464.
136. Kato,L, Tsuiki,H. The hydraulically powered biped walking machine with a high carrying capacity. In *IV Symp on External Control of Human Extremities*, , Dubrovnik, Yugoslavia, 1972. .
137. Keith,A. "The history of the human foot and its bearing on orthopedic practice." *J. Bone and Joint Surg.* 11 (1929), 10-32.
138. . Kenny,J.D. Investigation for a walking device for high efficiency lunar locomotion. , American Rocket Society Annual Meeting, Philadelphia, Penna., 1965 -
139. Kettelkamp,D.B., Johnston,R.C., Smidt,G.L., Chao,E.Y.S., Walker,M. "An electrogoniometric study of knee motion in normal gait." *J. Bone & Joint Surg.* 51A (1970),775-790.
140. Khadelwal,B.M., Frank,A.A. On the dynamics of an elastically coupled multi-body biped locomotion model. , Proc. JACC, Austin, Texas, 1974. .
141. Khosravi-Sichani, B. A preliminary study of a two segment artificial foot. Master Th., The Ohio State University, Columbus, Ohio, 1979.
142. Kinch,E.A.. Patent No. 1669906. Volume: *Vehicle propelling device.*, 1928.
143. Klein,C.A., Briggs,R.L. "Use of active compliance in the control of legged vehicles." *IEEE T. on Systems, Man, and Cybernetics* SMC-10, 7 (July 1980), 393-400.
144. Klien, Charles. *Limb motion for a 3 legged walking machine* , 1980.
145. Kljajic,M., Trnkoczy,A. "A study of adaptive control principle orthoses for lower extremities." *IEEE T. On System Mans and Cybernetics* SMC-8, 4 (April 1978), 313-321.
146. Koozekanani,S.H., McGhee,R.B. "Occupancy problems with pairwise exclusion constraints - an aspect of gait enumeration." *Journal of Cybernetics* 2, 4 (October 1973), 14-26.

147. Koozekanani,S.H., Stockwell,C.W., McGhee,R.B., Firoozmand,F. "On the role of dynamic models in quantitative posturography." *IEEE T. Biomedical Engineering'* (1980).
148. Kugushev;E.I., Jaroshevskij,V.S.. *Problems of selecting a gait for an integrated locomotion robot.* Institute of Applied Mathematics, USSR Academy of Sciences, Moscow, .
149. Larin,J.B. "Stabilization of biped walking apparatus." *Izv. AN SSSR. Mekhanika Tverdogo Tela* 11, 5 (1976),4-13.
150. Larin, V.B. "Control of a jumping robot, I. Choice of programmed trajectory." 14,6 (1979),27-32.
151. Lindholm,L.E., Oberg K.E.T.. *An optoelectronic instrument for remote on-line movement monitoring.* Chalmers University of Technology, Goteborg, Sweden,.
152. Liston,R.A.. *Walking machine. 1965* Annual Meeting of the American Society of Agricultural Engineers, University of Georgia,.1965.
153. Liston,R.A., Mosher,R.S.. *A versatile walking truck.*, Washington, D.C., 1968.
154. Mackerle,J. "Walking riders." T-68 12 (1968), 776\*777.
155. Manter,J, "Dynamics of quadrupedal walking." *J. of Experimental Biology* 15,4 (October 1938), 522-539.
156. Matsuoka,K. A model of repetitive hopping movements in man. , Proc. of Fifth World Congress on Theory of Machines and Mechanisms, 1979.
157. Matsuoka,K. "A mechanical model of repetitive hopping movements, (In Japanese)." *Biomechanisms* 5 (1980),251-258.
158. McGhee,R.B.. *Finite state control of quadruped locomotion.* Proc. of the Int. Symp. on External Control of Human Extremities, Dubrovnik, Yugoslavia, 1967.
159. McGhee,R.B. "Finite state control of quadruped locomotion." *Simulation* (September 1967).
160. McGhee,R.B. "Some finite state aspects of legged locomotion." *Math. Biosciences.* , 2 (February 1968), 67\*84.
161. McGhee,R.B., Frank,A.A. "On the stability properties of quadruped creeping gaits." *Math. Biosciences.* , 3 (1968), 331-351.
162. McGhee,R.B., FranjçA.A. "Some considerations relating to the design of autopilots for legged vehicles." *J. of Terramechanics* 6,. 1 (1969).
163. McGhee,R.B., Kuhner,M.B. On the dynamic stability of legged locomotion systems. In *Advances in External Control of Human Extremities*, M.M. Gavrilovic, A.B. Wilson , Jr., Eds., , Belgrade, 1969, pp. 431-442.
164. McGhec,R.B.. A mathematical *theory for legged locomotion systems.* Proc. 1970 Midwest Symposium on Circuit Theory, 1970.

165. McGhee,R.B., Jain,A.K. "Some properties of regularly realizable gait matrices." *Mathematical Biosciences* 13, 1/2 (February 1972), 179-193.
166. McGhee,R.B., Pai,A.L. "An approach to computer control for legged vehicles." .1. *Terramechanics* 11 (September 1972), 9-27.
167. McGhee,R.B., Orin,DE.. *An interactive computer-control system for a quadruped robot.* Proc. Symposium on Theory and Practice of Robots and Manipulators, Udine, Italy, 1973.
168. McGhee,R.B., Sun,S.S.. *On the problem of selecting a gait for a legged vehicle.* Proc. of VI IFAC Symposium on Automatic Control in Space, Tsakhkadzor, Armenian SSR, U.S.S.R., 1974.
169. McGhee,R.B., Buckett,J.R. "Hexapod." *Interface Age* (June 1977).
170. McGhee,R.B. "Adaptive locomotion of a multilegged robot over rough terrain." *IEEE Trans. Systems, Man, and Cybernetics SMC9*, 4 (April 1979), 176-182.
171. McGhee,R.B., Iswandhi,G.I. "Adaptive locomotion of a multilegged robot over rough terrain." *IEEE. T. on Systems, Man, and Cybernetics SMC9*, 4 (1979),176-182.
172. McGhee,R.B., Koozekanani,S.H., Weimer,F.C., Rahmani,S. Dynamic modelling of human locomotion. , Proc. of 1979 JACC, 1979.
173. McGhee,R.B. Robot locomotion with active terrain accommodation. , Proc. NSF Robotics Research Workshop, Univ. Rhode Island April, 1980.
174. McKenney,J.D. Investigation for a walking device for high efficiency lunar locomotion. Tech. Rept. Paper 201&61, American Rocket Society Space Flight Report to the Nation, New York, 1961 .
175. McMahon,T.A., Greene,P.R. "Fast running tracks." *Scientific American* ().
176. Mihajlov,D., Chang,C.W., Bekey,G.A., Perry,J. "Computer graphics in the study of normal and pathological human gait." *Medinfo* 77 (1977), 561-564.
177. Miller,D.L, Nelson,R.C.. *Biomechanics of sport.* Lea & Febiger, Philadelphia, Pennsylvania, 1973.
178. Milner,M. et al. "Angle diagram in the assessment of locomotor function." *S.A Medical Journal* 47 (June 1973), 951-957.
179. Milner,M., Brennan,P.K., Wilberforce,C.B.A. "Stroboscopic polaroid photography in clinical studies of human locomotion." *S.A. Medical Journal* 47 (June 1973),948-950.
180. Miyazaki, Furnio. *A Control Theoretic Study and Dynamic Linked Locomotion.*, 1980.
181. Mocchi,U., Petternella,M., Salinari,S. Experiments with six-legged walking machines with fixed gait. Tech. Rept. Report 2-12, Institute of Automation, University of Rome, June, 1972.
182. Morrison,R.A. Iron mule train. , Proc. Off-Road Mobility Research Symposium, Washington, D.C., 1968, pp. 381-400.

183. Morrison,J.B. "The mechanics of the knee-joint in relation to normal walking." *J. Biomechanics* 3 (1970),51-61.
184. Morrison,J.B. "The mechanics of muscle function in locomotion." *J. Biomechanics* 3 (1970), 43F461-
185. Morton,D.J.. *The human foot*. Columbia University Press, New York, 1935.
186. Morton,D.J.. *Human Locomotion and Body Form*. , University. of Columbia, Baltimore, 1952.
187. Mosher,R.S. Design and fabrication of a full-scale, limited motion pedipulator. General Electric report, 1965.
188. Mosher,R.S. Test and evaluation of a versatile walking truck., Proc. Off-Road Mobility Research Symposium, Washington, D.C., June, 1968, pp. 359-379.
189. Murray,M.P., Drought,A.B., Kovry,R.C. "Walking patterns of normal men." *J. Bone & Joint Surg.* 46-A, 2 (1964), 335-360.
190. Murray,M.P. "Gait as a total pattern of movement." *Am. J. Phys. Med* 46,1 (1967),290-333.
191. Murray,M.P., Seirig,A., Scholz,R.C. "Center of gravity, center of pressure and supportive forces during human activities." *J. of Applied Pysiology* 23, 6 (December 1967), 831-838. .
192. Muybridge,E.. *The human figure in motion*. Dover Publications, New York, 1955. First published' n 1901, Chapman and Hall, Ltd., London.,
193. Muybridge,E.. *Animals in motion*. Dover Publications, New York, 1957. First Published in 1899., Chapman and Hall, Ltd., London
194. NapierJ. "The antiquity of human walking." *Scientific American* 216, 4 (1967), 56-66.
- 195; Narinyani,A.S., Pyatkin,V.P., Kim,P.A., Dementyev,V.N. "Walking robot: a non-deterministic model of control."
196. Navinyani,A.S., Pytkin,V.P., Kim,P.A. Walking robot: a non-deterministic model of control. , Siberian Brnch, Novosibirs, .
197. Nilson,F.A.. *Supporting and Propelling Mechanismfor Motor Vehicles* , 1926.
198. Okhotsitskii,D.E., Platonov,A.K., et al.. *Control algorithms oflegged vehicle capable ofmastering obstacles. Proc. of 5th IFAC Symp. on Automatic Control in Space*, Geneva, 1973.
199. Okhotsimskii,D.E., Platonov,A.K.. *Control algorithms ofthe walker climbing over obstacles, Proc. 3rd IJCAI*, Stanford, California, 1973.
200. Okhotsimskii,D.E., Gurfinkel,V.S., Devyanin,E.A., Platonov,A.I'ç.. *Integrated walking robot development*. Institute of Applied Mathematics, USSR Academy of Sciences, .
201. Orin,D.E. A simulation study of a computer-assisted manual control system for legged vehicles. Master Th., The Ohio State University, Columbus, Ohio, December 1972.

202. Orin,D.E. *Interactive control of a six-legged vehicle with optimization of both stability and energy.* Ph.D. Th., The Ohio State University, Columbus, Ohio, March 1976
203. Orin,D.E.; McGhee,R.B., Vukobratovic,M. "Kinematic and kinetic analysis of openchain linkages utilizing Newton-Euler methods." *Mathematical Biosciences* 43 (1979), 107-130.
204. Orin,D.E., Oh,S.Y. "Determination of joint positions from limb segment constraints in robotic systems." *Proc of Fifth World Congress on Theory of Machines and Mechanisms* (1979), 860-863.
205. Orin,D.E. "A three degree-of-freedom leg for a hexapod locomotion vehicle." (1980).
206. Orin,D.E. "CARM: General-purpose subroutine package for robot linkage systems simulation." (1980).
207. Pai,A.L. *Stability and control of legged locomotion systems.* Ph.D. Th., The Ohio State University, Columbus, Ohio, 1971.
208. Pearson,K. "The control of walking." *Scientific American* (December 1976), 72-86.
209. Pedotti,A., et al. "Optimization of muscle-force sequencing in human locomotion." *Math. Bioscience* 28 (1978),57-76.
210. Perry,J. Foot floor contact guide. Rancho Los Amigos Hospital Kinesiology Service.
211. Petternella,M., Salinari,S. Six legged walking vehicles. Tech. Rept. Report No.74-31, University of Rome, 1974. Istituto di Automatica, Rome Italy
212. Plagenhoef,S.. *Patterns of Human Locomotion: A Cinematographic Analysis.* Prentice Hall, Englewood Cliffs, New Jersey, 1971.
213. Raibert,M.H. "A Model for sensorimotor control and learning." *Biol. Cyber.* 29 (1978),29-36.
214. Raibert,M.H. Dynamic stability and resonance in a one legged hopping machine. Conference on Theory and Practice of Robots and Anthropomorphic Systems, IFTMoM, September, 1981 .
215. Ralston,H.J. "Energy-speed relation and optimal speed during level walking." *iii. Z. Angew. Physical Einsch. ArbeitsPhysiol. Bd 17* (June 1958),277-283.
216. Ralston,HJ. Energetics of human walking. In *In Neural Control of Locomotion*, R.N. Herman, S.Grillner,.P.S. Stein, D.G. Stuart, Eds., Plenum Press, New York, 1975.
217. Roberts,W.M., Levirze,W.S., Zajac,F.E.,JII. "Propelling a torque controlled baton to a maximum height." *IEEE t. Automatic Control AC-24, 5* (1979), 779-782.
218. Robinson,D.J., Stockwell,C.W., Koozekanani,S.. *A method for evaluation of vestibular postural control in humans*, Boston, Mass., 1976. 29th ACEMB.
219. Rugg,L.A.. *Mechanical horse., 1893.*
220. Saltzman,E. "Levels of sensorimotor representation." *J. Math. Psychology* 20; 2 (1979).

221. Saunders, J.B., Irma, V.T., Eberhart, H.D. "The major determinants in normal and pathological gait." *The Journal of Bone & Joint Surg.* 35A, 3 (July 1953), 543-558.
222. Schneider, A. Yu., Gurfinkel, E.V., Kanaev, E.M., Ostapchuk, V.G. A system for controlling the extremities of an artificial walking apparatus. In Russian Report No.5, Physio-Technical Institute, 1974. General and Molecular Physics Series, Moscow, USSR
223. Schwartz, R.P., Heath, A.L., Morgan, D.W., Towns, R.C. "A quantitative analysis of recorded variables in the walking patterns of normal adults." *J. Bone & Joint Surg.* 46-A (1964), 324-334.
224. Seifert, H.S. "The lunar pogo stick." *J. Spacecraft and Rockets* 4,7 (1967).
225. Seifert, H.S. Small scale lunar surface personnel transporter employing the hopping mode. Tech. Rept. Report No.397, Stanford University Dept. Aeronautics and Astronautics, 1968, 1970. •
226. Seireg, A., Arvikar, R.J. "A mathematical model for the evaluation of forces in lower extremities of the musculo-skeletal system." *J. of Biomechanics* 6 (1973), 313-326.
227. Severin, F.V., Orlovskii, G.N., Shik, M.L. "Work of the muscle receptors during controlled locomotion." *Biophysics* 12, 3 (1967), 575-586.
228. Shigley, R. Mechanics of walking vehicles. Tech. Rept. Report No. 7, OTAC, Detroit, Michigan, 1957. Land Locomotion Laboratory
229. Shik, M.L., Oiovskaia, G.W. Coordination of the limbs during running of the dog. Institute of Biological Physics, April, 1965. Academy of Sciences, Moscow, U.S.S.R.
230. Sindall, J.N. "The wave mode of walking locomotion." *Journal of Terramechanics* 1, 4 (June 1964), 54-73.
231. Smoliar, Stephen W.. A lexical analysis of labanotation. University of Pittsburgh Tech. Report, July 1978.
232. Snell, E.. *Reciprocating Load Carrier..* 1947.
233. Speckert, Glen. "A computerized Look at cat locomotion or one way to scan a caC", A.I. Memo 374 (July 1976).
234. Stewart, G.W.. *Introductions to matrix computations.* Academic Press, New York, 1973.
235. Stepaneko, Y. Dynamics of complex mechanisms. Mathematical Institute, Belgrade
236. Stuart, D.G., Withey, T.P., Wetzel, M.C., Goslow, G.E., Jr. Time constraints for inter-limb coordination in the cat during unresfrained locomotion. In control of posture and locomotion, New York, 1973, pp. 537 -560.
237. Sun, S.S. *A theoretical study of gaits for legged locomotion systems.* Ph.D. Th., 1974.
238. Tomovic, R.. "On the synthesis of self-moving automata." *Automation and Remote Control* 26 (February 19-5).

239. Tomovic,R. "A general theoretical model of creeping displacement." *Cybernetics, IV (1961),98-107.*  
English translation •
240. Tomovic,R., Karplus,W.R.. *Land locomotion simulation and control.* , Opatija, Yugoslavia, 1961.  
Proc. Third International Analogue Computation Meeting
241. Tomovic,R., McGhee,R.B. "A finite state *approach to the synthesis of bioengineering control systems.*"  
*IEEE Trans on Human Factors in Electronics* 7,2 (June 1966),65-69.
242. Tomovic,R., Bellman. "Systems approach to muscle control." *Math. Biosci* 8 (1970).
243. Trnkoczy,A., Bajd,T., Malezic,M. "A dynamic model of the ankle joint under functional electrical  
stimulation in free movement and isometric conditions." *J. of Biomechanics* 9 (1976), 509-519.
244. Urschel,W.E.. *Walking Tractor.* , 1949.
245. Vukobratovic,M., Frank,A.A. Legged locomotion studies. In *Advances in External Control of Human  
Extremities*, M.M. Gavrilovic, A.B. Wilson Jr., Belgrade, Eds., 1969, pp. 407-430.
246. Vukobratovic,M., Juricic',D. "Contribution to the synthesis of biped gait." *IEEE Trans. on Biomedical  
Engineering BME-16 (January 1969).*
247. Vukobratovic,M., Frank,A.A., Juricic',D. "On the stability of biped locomotion." *IEEE Tran& on  
Biomedical Engineering BME-17 (January 1970).*
248. Vukobratovic,M., Juricic',D., Frank,A.A. "On the control- and stability of one class of biped locomotion  
systems." *Trans. ASME Journal of Basic Engineering* (June 1970), 328-332.
249. Vukobratovic,M. "Contributions to the study of anthropomorphic systems." *IEEE Trans. on  
Systems, Man, & Cybernetics* 2 (1972).
250. Paper 18.1, Proc. IFAC V World Congress. *Contribution to the study of anthropomorphic robots, Paris,*  
1972.
251. Vukobratovic,M., Stepaneko,Y. "On the stability of anthropomorphic systems." *Mathematical  
Biosciences /4 (October 1972), 1-38.*
252. Vukobratovic,M. "Dynamics and control of anthropomorphic active mechanisms." *IEEE Trans. on  
Systems, Man, & Cybernetics* 3 (1973),313-332.  
First CISM-IFTOMM Symposium on Theory and Practice of Robots and Manipulators
253. Vukobratovic,M., Stepaneko,Y. "Mathematical models of general *anthropomorphic systems.*"  
*Mathematical Biosciences* 17 (1973), 191-242.
254. Vukobratovic,M., et al. "Development of active exoskeletons." *Medical and Biological Engineering*  
(1973).
255. Vukobratovic,M., Hristic,D., Stojiljkovic,Z. "Development of active anthropomorphic exoskeletons."  
*Medical and Biological Engineering (January 1974), 66-80.*
256. Vukobratovic,M. *Legged locomotion robots and anthropomorphic systems* Research monograph,  
Institute Mihailo Pupin, Belgrade, Yugoslavia, 1975.

257. Vukobratovic,M. Legged locomotion robots: mathematical models, control algorithms and realizations . 1975. Unpublished report
258. Vukobratovic,M., Okhotsimiskii,D.E. "control of legged locomotion robots." Proc 1975 IFiIC, Planary Session (1975).
259. Vukobratovic,M., Hristic,D., Stokic',D., Gluhajic',N. "New method of artificial motion synthesis and application to locomotion robots and manipulators." 0. Check NASA search lists
260. Wetzel,M.C., Atwater,A.E., Stuart,D.G. Movements of the hindlimb during locomotion of the cat. In *Neural control of locomotion*, R.N. Herman, S.Grillner, P.S. Stein, D.G. Stuart, Eds., Plenum Press, New York, 1975.
261. Williams,M., Lissner,H.R.. *Biomechanics of human motion*. W.B. Saunders Company, Philadelphia, 1962.
262. Wilson,D.M. "Insect walking." *Annual Review of Entomology II (1966),103-121*.
263. Wilson,D.M. "Stepping patterns in tarantula spiders." *J. Exp. Biol 47 (1967),133-151*.
264. Winter,D.A., Greenlaw,R.K., Hobson,D.A. "Television-computer analysis of kinematics of human gait." *Computer and Biomedical Research 5 (1972)*.
265. Wirta,R.W, Herman,R.. *Some observations of relations among gait variable&* , 1975. Krusen Center for Research and Engineering Temple University, Moss Rehabilitation Hospital, Philadelphia
266. Witt,D.C. A feasibility study on automatically-controlled powered lower-limb prosthesis. University of Oxford,. Department of Engineering Science Report
267. Yang,P. A study of-electronically *controlled orihotic kneejoint systems*. Ph.D. Th., The Ohio State University, Columbus, Ohio, 1976.
268. Zheng, Yuan" Fang. *A Study of 9 Link Biped Model with 2 Feet. . . .*