

From Gaze to Focus of Attention

Rainer Stiefelhagen¹, Michael Finke², Jie Yang², and Alex Waibel^{1,2}

¹ Universität Karlsruhe, Computer Science, ILKD
Am Fasanengarten 5, 76131 Karlsruhe, Germany
stiefel@ira.uka.de

<http://werner.ira.uka.de>

² Carnegie Mellon University, Computer Science Department
5000 Forbes Avenue, Pittsburgh, PA, USA
{[finkem](mailto:finkem@cs.cmu.edu), [yang+](mailto:yang+@cs.cmu.edu), [ahw](mailto:ahw@cs.cmu.edu)}@cs.cmu.edu
<http://is.cs.cmu.edu>

Abstract. Identifying human gaze or eye-movement ultimately serves the purpose of identifying an individual's focus of attention. The knowledge of a person's object of interest helps us effectively communicate with other humans by allowing us to identify our conversants' interests, state of mind, and/or intentions. In this paper we propose to track focus of attention of several participants in a meeting. Attention does not necessarily coincide with gaze, as it is a perceptual variable, as opposed to a physical one (eye or head positioning). Automatic tracking focus of attention is therefore achieved by modeling both, the persons head movements as well as the relative locations of probable targets of interest in a room. Over video sequences taken in a meeting situation, the focus of attention could be identified up to 98% of the time.

1 Introduction

During face-to-face communication such as discussions or meetings, humans not only use verbal means, but also a variety of visual cues for communication. For example, people use gestures; look at each other; and monitor each other's facial expressions during a conversation.

In this research we are interested in tracking at whom or what a person is looking during a meeting. The first step towards this goal is to find out at which direction a person is looking, i.e. his/her gaze. Whereas a person's gaze is determined by his head pose as well as his eye gaze, we only consider head pose as the indicator of the gaze in this paper.

Related work on estimating human head pose can be categorized in two approaches: model based and example based approaches: In model-based approaches usually a number of facial features, such as eyes, nostrils, lip-corners, have to be located. Knowing the relative positions of these facial features, the head pose can be computed [2, 8, 3]. Detecting the facial features, however, is a challenging problem and tracking is likely to fail. Example based approaches either use some kind of function approximation technique such as neural networks [1, 7, 6], or a face database [4] to encode example images. Head pose of new

images is then estimated using the function approximator, such as the neural networks, or by matching novel images to the examples in the database. With example based approaches usually no facial landmark detection is needed, instead the whole facial image is used for classification. In the Interactive Systems Lab, we have worked on both approaches. We employed purely neural network [7] and model-based approaches to estimate a user's head pose [8]. We also demonstrated that a hybrid approach could enhance robustness of a model based system [9]. In this paper, we extend the neural network approach to estimating the head pose in a more unrestricted situation.

A major contribution of this paper is to use hidden markov model (HMM) to detect a user's focus of attention from an observed sequence of gaze estimates. We are not only interested in which direction a user is looking at during the meeting, but also want to know at whom or what he is looking. This requires a way of incorporating knowledge about the world into the system to interpret the observed data. HMMs can provide an integrated framework for probabilistically interpreting observed signals over time. We have incorporated knowledge about the meeting situation, i.e. the approximate location of participants in the meeting into the HMMs by initializing the states of person dependent HMMs appropriately. We are applying these HMMs to tracking at whom the participants in a meeting are looking. The feasibility of the proposed approach have been evaluated by experimental results.

The remainder of the paper is organized as follows: section 2 describes the neural network based head pose estimation approach. In section 3 we introduce the idea of interpreting an observed sequence of gaze directions to find a user's focus of attention in each frame; define the underlying probability model and give experimental results. We summarize the paper in section 4.

2 Estimating Head Pose with Neural Nets

The main advantage of using neural networks to estimate head pose as compared to using a model based approach is its robustness: With model based approaches to head pose estimation [2, 8, 3], head pose is computed by finding correspondences between facial landmarks points (such as eyes, nostrils, lip corners) in the image and their respective locations in a head model. Therefore these approaches rely on tracking a minimum number of facial landmark points in the image correctly, which is a difficult task and is likely to fail. On the other hand, the neural network-based approach doesn't require tracking detailed facial features because the whole facial region is used for estimating the user's head pose. In our approach we are using neural networks to estimate pan and tilt of a person's head, given automatically extracted and preprocessed facial images as input to the neural net. Our approach is similar to the approach as described by Schiele et. al. [7]. However, the system described in [7] estimated only head rotation in pan direction. In this research we use neural network to estimate head rotation in both pan and tilt directions. In addition, we have studied two different image preprocessing approaches. Rae et. al. [6] describe a user depen-



Fig. 1. Example images take during data collection as used for training and testing of the neural nets

dent neural network based system to estimate pan and tilt of a person. In their approach, color segmentation, ellipse fitting and Gabor-filtering on a segmented face are used for preprocessing. They report an average accuracy of 9 degrees for pan and 7 degrees for tilt for one user with a user dependent system. In the remainder of this section we describe our neural net based approach to estimate user's head pose (pan and tilt).

2.1 Data Collection Setup

During data collection, the person that we collected data from had to sit on a chair on a specific location in the room, with his eyes at a height of approximately 130cm. In a distance of one meter and at a height of one meter a video camera to record the images was placed on a tripod. We placed marks on three walls and the floor on which the user had to look one after another. The marks were placed in such a way that the user had to look in specific well known directions, and ranged from -90 degrees to +90 degrees for pan, with one mark each ten degrees, and from +15 degrees to -60 degrees for tilt, with one mark each 15 degrees. Once the user was looking at a mark, he could press a mouse-button, and 5 images were being recorded together with the labels indicating the current head pose. We collected data of 14 male and 2 female subjects. Approximately half of the persons were wearing glasses.

2.2 Preprocessing of Images

We investigated two different preprocessing approaches: Using normalized grayscale images of the user's face as the input to the neural nets and applying edge detection to the images before feeding them into the nets. To locate and extract the faces from the collected images, we have used a statistical skin color model [10]. The largest skin colored region in the input image was selected as the face.

In the first preprocessing approach, histogram normalization was applied to the grayscale face images as a means towards normalizing against different lighting conditions. No additional feature extraction was performed and the normalized grayscale images were downsampled to a fixed size of 20x30 images and then used as input to the nets.

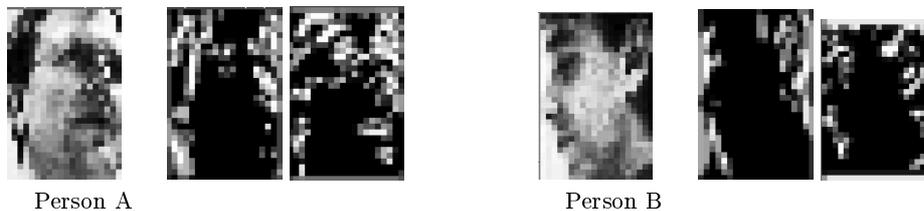


Fig. 2. Preprocessed images: normalized grayscale, horizontal edge and vertical edge image (from left to right)

In the second approach, we applied a horizontal and a vertical edge operator plus thresholding to the facial grayscale images. Then the resulting edge images were downsampled to 20x30 pixels and were both used as input to the neural nets. Figure 2 shows the corresponding preprocessed facial images of the two person depicted in Figure 1. From left to right, the normalized grayscale image, the horizontal and vertical edge images are displayed.

2.3 ANN Architecture

We trained separate nets to estimate pan and tilt of a person's head. Training was done using a multilayer perceptron architecture with one hidden layer and standard backpropagation with momentum term. The output layer of the net estimating pan consisted of 19 units representing 19 different angles (-90, -80, ..., +80, +90 degrees). The output layer of the tilt estimating net consisted of 6 units representing the tilt angles +15, 0, -15, .. -60 degrees. For both nets we used gaussian output representation. With a gaussian output representation not only the single correct output unit is activated during training, but also its neighbours receive some training activation decreasing with the distance from the correct label. The input retina of the neural nets varied between 20x30 units and 3x20x30 units depending on the different number and types of input images that we used for training (see 2.4).

2.4 Training and Results

We trained separate user independent neural nets to estimate pan and tilt. The neural nets were trained on data from twelve subjects from our database and evaluated on the remaining four other subjects. The data for each user consisted of 570 images, which results in a training set size of 6840 images and a test set size of 2280 images.

As input to the neural nets, we have evaluated three different approaches: 1) Using histogram normalized grayscale images as input to the nets. 2) Using horizontal and vertical edge images as input and 3) using both, normalized grayscale plus horizontal and vertical edge images as input. Table 1 summarizes the results that we obtained using the different types of input images. When using

Table 1. Person independent results (Mean error in degrees) using different preprocessing of input images. Training was done on twelve users, testing on four other users.

Net Input	Pan	Tilt
Grayscale	12.0	13.5
Edges	14.0	13.5
Edges + Grayscale	9.0	12.9

normalized grayscale images as input we obtained a mean error of 12.0 degrees for pan and 13.5 degrees for tilt on our four user test set. With horizontal and vertical edge images as input, a slightly worse accuracy for estimating the pan was obtained. Using both, normalized grayscale image as well as the edge images as input to the neural net significantly increased the accuracy and led to accuracy of 9.0 degrees and 12.9 degrees mean error for pan and tilt respectively. These results show, that it is indeed feasible to train a person independent neural net based system for head pose estimation. In fact, the obtained results are only slightly worse than results obtained with a user dependent neural net based system as described by Rae et. al.[6]. As compared to their results, we did not observe serious degradation on data from new users. To the contrary, our results indicate that the neural nets can generalize well to new users.

3 Modelling Focus of Attention Using Hidden Markov Models

The idea of this research is to map the observed variable over time namely the gaze direction to discrete states of what the person is looking at, i.e. his focus of attention. Hidden Markov Models (HMM) can provide an integrated framework for probabilistically interpreting observed signals over time.

In our model, looking at a certain target is modelled as being in a certain state of the HMM and the observed gaze estimates are considered as being probabilistic functions of the different states. Given this model and an observation sequence of gaze directions, as provided by the neural nets, it is then possible to find the most likely sequence of HMM states that produced the observations. Interpreting being in a certain state as looking at a certain target, it is now possible to estimate a person’s focus of attention in each frame. Furthermore, we can iteratively reestimate the parameters of the HMM so as to maximize the likelihood of the observed gaze directions, leading to more accurate estimates of foci of attention.

We have tested our models on image sequences recorded from a meeting. In the meeting, four people were sitting around a table, talking to and looking at each other and sometimes looking onto the table. Figure 3 shows two example images taken during data collection of the meeting. For two of the speakers we then estimated their gaze trajectory with the neural nets described in the



Fig. 3. Example images from “meeting” data as used for HMM evaluation

previous section. For each user we have applied an HMM to detect his focus of attention given the observed gaze directions over time.

3.1 HMM Design

Knowing that there were four people sitting around a table, we modelled the targets for each person P as the following four states: P is looking to the person sitting to his right, P is looking to the person to his left, P is looking to the person in front of him, P is looking down on the table. In our model the observable symbols of each state are the pose estimation results as given by the neural nets, that is the angles for pan and tilt ω_{pan} and ω_{tilt} . We have parameterized the state dependent observation probabilities $B = b_i(\omega)$ for each state i , where $i \in \{left, right, center, table\}$, as two-dimensional gaussian distributions with diagonal covariance matrices. Assuming that we know the approximate positions of the participants of the meeting relative to each other, we initialized the observation probability distributions of the different states with the means of the gaussians set to the expected viewing angle, when looking at the corresponding target. The transition matrix $\mathbf{A} = (a_{ij})$ was initialized to have high transition probabilities for remaining in the same state ($a_{ii} = 0.6$) and uniformly distributed state transition probabilities for all other transitions. The initial state distribution was chosen to be uniform.

3.2 Probabilistic Model

Let $O = \omega_1\omega_2 \dots \omega_T$ be the sequence of gaze direction observations $\omega_t = (\omega_{pan,t}, \omega_{tilt,t})$ as predicted by the neural nets. The probability of the observation sequence given the HMM is given by the sum over all possible state sequences q :

$$\begin{aligned}
 p(\mathbf{O}) &= \sum_q p(O, q) \\
 &= \sum_q p(O|q) p(q) \\
 &= \sum_q \prod_t p(\omega_t|q_t) p(q_t|q_{t-1}) \\
 &= \sum_q \prod_t b_{q_t}(\omega) a_{q_t, q_{t-1}}.
 \end{aligned}$$

To find the single best state sequence of foci of attention, $q = q_1 \dots q_n$ for a given observation sequence, we need to find $\max_q(p(O, q))$. This can be efficiently computed by the Viterbi algorithm [5]. Thus, given the HMM and the

Table 2. Percentage of falsely labelled frames without using the HMM and with using HMM before and after parameter reestimation

Seq.	no HMM	HMM, no reest.	HMM, reest.
A	9.4 %	5.4 %	1.8 %
B	11.6 %	8.8 %	3.8 %

observation sequence of gaze directions, we can efficiently find the sequence of foci of attention using the Viterbi algorithm.

So far we have considered the HMM to be initialized by knowledge about the setup of the meeting. It is furthermore possible to adapt the model parameters $\lambda = (\mathbf{A}, \mathbf{B})$ of the HMM so as to maximize $p(O|\lambda)$. This can be done in the EM (Expectation-Maximization) framework by iteratively computing the most likely state sequence and adapting the model parameters as follows:

– means:

$$\hat{\mu}_{pan}(i) = E_i(\omega_{pan}) = \frac{\sum \phi_{i,t} \omega_{pan,t}}{\sum \phi_{i,t}}$$

$$\hat{\mu}_{tilt}(i) = E_i(\omega_{tilt}) = \frac{\sum \phi_{i,t} \omega_{tilt,t}}{\sum \phi_{i,t}}$$

$$, \text{ where } \phi_{i,t} = \begin{cases} 1 & : q_t = i \\ 0 & : \textit{otherwise} \end{cases}$$

– variances:

$$\sigma_{pan}^2(i) = E_i(\omega_{pan}^2) - (E_i(\omega_{pan}))^2$$

$$\sigma_{tilt}^2(i) = E_i(\omega_{tilt}^2) - (E_i(\omega_{tilt}))^2$$

– transition probabilities:

$$a_{i,j} = \frac{\text{number of transition from state } i \text{ to } j}{\sum_t \phi_{i,t}}$$

3.3 Results

To evaluate the performance of the proposed model, we compared the state-sequence given by the Viterbi-decoding to hand-made labels of where the person was looking to. Both of the evaluated sequences contained 500 frames and lasted about one and a half minute each. We evaluated the performance of the HMM without model parameter adaption and with automatic parameter adaption. Furthermore we evaluated the results obtained by directly mapping the output of the neural nets to the different viewing targets. Table 2 reports the obtained results. It can be seen that compared to directly using the output of the neural nets, a significant error reduction can already be obtained by using an HMM without parameter adaption on top of the ANN output. Using parameter reestimation however, the error can be furthermore reduced by a factor of two to three on our evaluation sequences.

4 Conclusion

In this paper we have addressed the problem of tracking a person's focus of attention during a meeting situation. We have proposed the use of a HMM framework to detect focus of attention from a trajectory of gaze observations and have evaluated the proposed approach on two video sequences that were taken during a meeting. The obtained results show the feasibility of our approach. Compared to hand-made labels, accuracy of 96% and 98% was obtained with the HMM-based estimation of focus of attention.

To estimate a person's gaze we have trained neural networks to estimate head pose from facial images. Using a combination of normalized grayscale images, horizontal and vertical edge images of faces as input to the neural nets, we have obtained accuracy of 9.0 degrees and 12.9 degrees for pan and tilt respectively on a test set of four users which have not been in the training set of the neural nets.

References

1. D. Beymer, A. Shashua, and T. Poggio. Example-based image analysis and synthesis. In *Proceedings of Siggraph'94*, 1994.
2. Andrew H. Gee and Roberto Cipolla. Non-intrusive gaze tracking for human-computer interaction. In *Proc. Mechatronics and Machine Vision in Practise*, pages 112–117, 1994.
3. T.S. Jebara and A. Pentland. Parametrized structure from motion for 3d adaptive feedback tracking of faces. In *Proceedings of Computer Vision and Pattern Recognition*, 1997.
4. A. Pentland, B. Moghaddam, and T. Starner. View-based and modular eigenspaces for face recognition. In *Proceedings of IEEE Conference on Computer Vision and Pattern Recognition*, 1994.
5. Lawrence R. Rabiner. *Readings in Speech Recognition*, chapter A Tutorial on Hidden Markov Models and Selected Applications in Speech Recognition, pages 267–295. Morgan Kaufmann, 1989.
6. Robert Rae and Helge J. Ritter. Recognition of human head orientation based on artificial neural networks. *IEEE Transactions on neural networks*, 9(2):257–265, March 1998.
7. Bernt Schiele and Alex Waibel. Gaze tracking based on face-color. In *International Workshop on Automatic Face- and Gesture-Recognition*, pages 344–348, 1995.
8. Rainer Stiefelhagen, Jie Yang, and Alex Waibel. A model-based gaze tracking system. In *Proceedings of IEEE International Joint Symposia on Intelligence and Systems*, pages 304 – 310, 1996.
9. Rainer Stiefelhagen, Jie Yang, and Alex Waibel. Towards tracking interaction between people. In *Intelligent Environments. Papers from the 1998 AAAI Spring Symposium*, Technical Report SS-98-02, pages 123–127, Menlo Park, California 94025, March 1998. AAAI, AAAI Press.
10. Jie Yang and Alex Waibel. A real-time face tracker. In *Proceedings of WACV*, pages 142–147, 1996.